



The Lift SuperStore

We make buying lifts easy!

CALL 866-799-5438

WWW.LIFTSUPERSTORE.COM

LSS2P9CF
LSS2P9BP

CHAIN DRIVE "HOBBY CAR" 2 POST LIFT 9,000 LB. CAPACITY



CLEAR FLOOR
"FLEX-METRIC"

BIG BLOCK SS



LOW CEILING
MODEL

RAGTOP

CARS & LIGHT DUTY TRUCKS

THE BIG BLOCK 9,000 LB. (4.1T) CAPACITY LIFT IS YOUR TRADITIONAL TWO POST IDEAL FOR THE HOME/HOBBY CAR ENTHUSIASTS. GET OFF THE FLOOR AND START SERVICING YOUR VEHICLES ON A QUALITY PRODUCT AT AN ENTRY LEVEL PRICE.

THE RAGTOP 9,000 LB. (4.1T) CAPACITY LIFT IS YOUR SOLUTION FOR A LOW CEILING GARAGE. THIS HOME/HOBBY LIFT HAS 9'4" COLUMNS AND NO OVERHEAD OBSTRUCTIONS MAKING IT A PERFECT LIFT FOR LIMITED CEILING HEIGHT.

THE LIFTSUPERSTORE DIFFERENCE

BIG BLOCK & RAGTOP FEATURES



NORTH AMERICAN
"BUCHER" 2 HP POWER UNIT



"FLEX-METRIC" ARM DESIGN

RUBBER CONTACT
ADAPTERS



"ANODIZED STACKING"
HEIGHT ADAPTERS



PADDED BAR
OVERHEAD SHUTOFF

FORK LIFT STYLE
2" / 51MM WIDE
LEAF "CHAIN
OVER" 36" /
914MM LIFTING
CYLINDERS
PROVIDE SMOOTH
SAFE LIFTING
WITH LESS
MAINTENANCE




2 POST HOBBY CAR LIFTS


9,000 LB. (4.1T) CAPACITY

BIG BLOCK SS LSS2P9CF RAGTOP LSS2P9BP

TECHNICAL SPECIFICATIONS

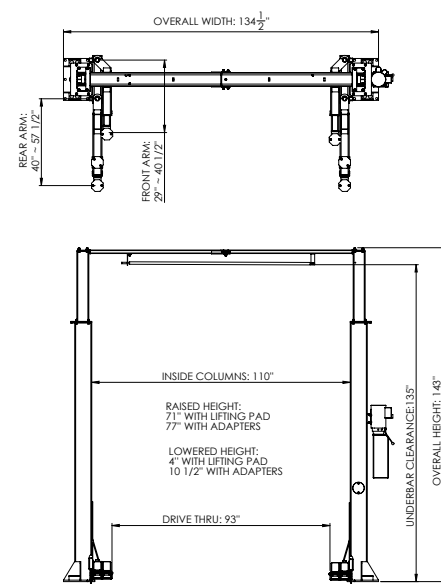

BIG BLOCK SS

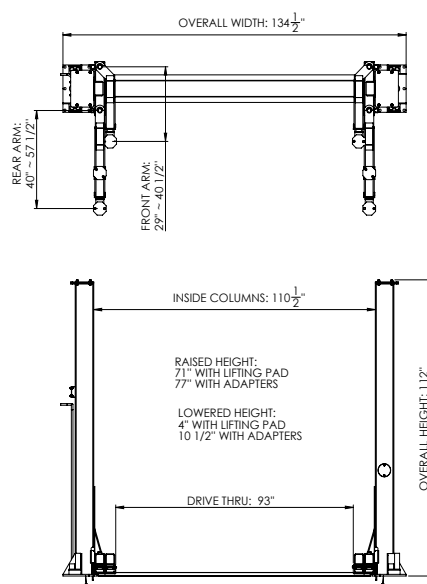

RAGTOP

- STRONGER AND MORE STABLE STRUCTURE - BOTH THE RAGTOP & BIG BLOCK SS ARE BUILT WITH HEAVY "BOX STYLE" COLUMNS. THE LIFTS ARE DESIGNED WITH HEAVIER ARMS, COLUMNS AND CARRIAGES THAT PROVIDES THE EXTRA STRENGTH REQUIRED WHEN LIFTING LONG BOX LIGHT DUTY TRUCKS. THE LOW DRIVE OVER HEIGHT OF 4" / 102MM ALSO ACCOMMODATES MOST CARS.
- PREMIUM NORTH AMERICAN COMPONENTS - NORTH AMERICAN MADE MONARCH (BUCHER) 2HP / 1.5KW POWER UNIT, 3/8" / 9.5MM EQUALIZING CABLES, CYLINDERS AND HOSES.
- DESIGNED TO INDUSTRY STANDARDS, THE LIFTSUPERSTORE THOROUGHLY REVIEWS ALL LIFT PRODUCTS WITH AN INDEPENDENT PANEL OF PROFESSIONAL AUTOMOTIVE TECHNICIANS TO INSURE THAT THEY MEET THE CUSTOMER EXPECTATIONS FOR QUALITY AND PERFORMANCE.
- CORROSION RESISTANT PROTECTION - STEEL COMPONENTS ARE WHEEL-A-BRATOR SHOT BLASTED AND ACID WASHED BEFORE A POWDER COAT FINISH IS APPLIED.
- LIFTS HIGHER TO PROVIDE 71" UNDER CAR WORK AREA - EXTENDED LIFTING HEIGHT AVAILABLE WITH ADAPTERS FOR MAXIMUM LIFT HEIGHT OF 77 / 1956 MM.

- FLEXIBLE VEHICLE LOADING - FLEX-METRIC ARM DESIGN USE TWO (2) PIECE "OFFSET" FRONT AND STRAIGHT TWO (2) PIECE REAR LIFTING ARMS FOR OPTIMUM ASYMMETRIC AND SYMMETRIC LOADING OPPORTUNITIES.
- MORE MODELS TO CHOSE FROM - COBRA GT FOR HEAVIER VEHICLES AND RAGTOP FOR LOW CEILING, BOTH OFFER FLEXMETRIC DESIGN LIFT ARMS WITH TWO (2) PIECE OFF SET FRONT AND STRAIGHT LONG REACH REAR LIFTING ARMS. COBRA GT IS FIELD ADJUSTABLE WITH TWO OVERHEAD HEIGHT SETTINGS OF 145 1/4" OR 141 1/4" / 3689 OR 3588MM.
- BUILT TO INDUSTRY SAFETY STANDARDS - MANUAL MECHANICAL LOCK RELEASES WITH LOCKS EVERY 3" / 76MM. BUILT IN FLOW CONTROL AND VELOCITY FUSE HYDRAULIC PROTECTION. PADDED BAR OVERHEAD SHUTOFF PREVENT DAMAGE TO HIGHER VEHICLES.
- REDUCED VEHICLE SETUP TIME - "DROP IN" STYLE LIFT PADS HAVE A LOWERED HEIGHT WITH RUBBER PAD OF 4" / 102MM AND CAN BE EXTENDED BY USING ANODIZED DROP IN ADAPTERS. POWER UNIT CAN BE INSTALLED ON EITHER COLUMN.
- CABLE EQUALIZED WITH 3/8" / 9.5MM PRESTRESSED CABLES AND 3" / 76MM STEEL PULLEYS WITH BRONZE SELF LUBRICATING BUSHINGS.

SPECIFICATIONS		
MODEL	BIG BLOCK SS	RAGTOP
CAPACITY	9,000 LB. (4T)	9,000 LB. (4T)
OVERALL HEIGHT	143" (3632MM)	112" (2845MM)
OVERALL WIDTH	135" (3429MM)	135" (3429MM)
WIDTH BETWEEN COLUMNS	110" (2794MM)	110" (2794MM)
DRIVE THRU WIDTH	93" (2362MM)	93" (2362MM)
UNDER BAR CLEARANCE	135" (3429MM)	N/A
HEIGHT TO LOWERED PAD	4" (102MM)	4" (102MM)
RAISED HEIGHT FROM PAD	71" (1803MM)	71" (1803MM)
RAISE HEIGHT WITH ADAPTERS	77" (1956MM)	77" (1956MM)
FRONT ARM REACH	29" TO 40" (737 TO 1029MM)	29" TO 40" (737 TO 1029MM)
REAR ARM REACH	40" TO 57" (1016 TO 1461MM)	40" TO 57" (1016 TO 1461MM)
MECHANICAL LOCK RELEASE	MANUAL EACH SIDE	MANUAL EACH SIDE
LIFTING TIME	65 SECONDS	65 SECONDS
ADAPTERS INCLUDED	1 1/2" & 6" STACK ADAPTERS SLIDING ARM ADAPTERS	1 1/2" & 6" STACK ADAPTERS SLIDING ARM ADAPTERS
ANCHOR BOLTS & SHIMS INCLUDED	YES	YES
ELECTRICAL REQUIREMENTS	220V - 1PH - 60 HZ	220V - 1PH - 60 HZ

DISCLAIMER: TLS INC. IS CONSTANTLY UPDATING THEIR PRODUCTS TO MAINTAIN THE HIGHEST POSSIBLE STANDARDS OF PERFORMANCE AND SAFETY. THE SPECIFICATIONS INCLUDED IN THIS BROCHURE ARE ONLY ACCURATE AT THE TIME OF PRINTING AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.



LIFT SUPERSTORE DISTRIBUTORS SHOWROOMS & PARTS/SERVICE



THE LIFT SUPERSTORE
HEAD OFFICE & MANUFACTURING
2300 SPEERS RD OAKVILLE ONTARIO



VANCOUVER, CALGARY, QUEBEC



ALABAMA, ARIZONA, CALIFORNIA,
FLORIDA, TEXAS, KANSAS,
NEW HAMPSHIRE

1-866-799-5438