



CALL 866-799-LIFT INTERLINK

LSSP2P57 / LSSP2P70

2 POST RAMP STYLE PARKING STORAGE LIFT 5,720 LB. (2.6T) OR 7,048LB (3.2T) CAPACITY

“BI-PARK STACKER” - 2 LEVEL STORAGE
INSIDE OR OUTDOORS




70.9" OR 80.7" (1800 OR
2050MM) RISE

DECK WIDTH 82.7", 86.6"
OR 94.5" (2100, 2200 OR
2400MM) WIDE


BI-PARK STACKER

THE BI-PARK IS A COMPACT DOUBLE CAR STACKER THAT LIFTS THE CAR SMOOTHLY AND QUICKLY INTO POSITION. THE PLATFORM WILL ACCOMMODATE THE NEW GENERATION SUVs, 4-WHEEL-DRIVE VEHICLES AND LOW CLEARANCE SPORTS CARS. THE GALVANIZED PLATFORM STRUCTURE IS CORROSION RESISTANT AND DESIGNED TO PREVENT FLUIDS FROM THE UPPER VEHICLE DRIPPING DOWN ON THE LOWER ONE.


FEATURES



RACK AND PINION STYLE
SYNCHRONIZATION WITH CROSS
MOUNTED TORSION BAR. PUSH
STYLE HYDRAULIC CYLINDER IN
EACH COLUMN



REINFORCED ROLL FORMED
COLUMNS WITH 4" (102MM) STEEL
CARRIAGE ROLLERS REDUCE
WEAR & MAINTENANCE

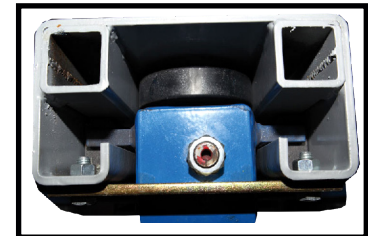

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

2 POST RAMP STYLE

5,720 OR 7048 LB. (2.6 OR 3.2T) CAPACITY



BI-PARK 2 POST PARKING STORAGE LIFT LSSP2P57 & LSSP2P70

BENEFITS

- LOW MAINTENANCE PROBLEM FREE DESIGN - TWIN 70" / 1778MM STROKE HIGH PRESSURE CYLINDERS MOUNTED VERTICALLY IN EACH COLUMN. TOUGH WHEEL-A BRATOR FINISHED STEEL STRUCTURE WITH PREMIUM DOUBLE BAKE FINISH. RUNWAY PLATFORM IS "HOT DIPPED" GALVANIZED. THERE ARE NO LIFTING CABLES OR PULLEYS REQUIRED.
- COMPACT SPACE SAVING DESIGN - STORES UP TO TWO VEHICLES IN BUILDINGS WITH CEILINGS AS LOW AS 10.5' / 3200MM. DESIGNED TO FIT MOST STANDARD GARAGE LAYOUTS WITH A FOOTPRINT AS SMALL AS 104.4" / 2602MM WIDE BY 142.5" / 3619MM LONG
- GREATER STRUCTURAL STABILITY - BRAKE PRESS FORMED COLUMNS 118" / 2997MM TALL ARE REINFORCED WITH TUBE STEEL FOR EXTRA STRENGTH. FLOOR MOUNTED OUTRIGGER BARS 65" / 1651MM LONG FURTHER SUPPORT EACH COLUMN. A TORSION BAR RACK AND PINION ASSEMBLY

ENGAGES THE RACK AND ALIGNS THE PLATFORM SO THAT THE WEIGHT ON THE PLATFORM DOES NOT NEED TO BE BALANCED. THIS ALLOWS THE CAR TO BE PARKED FACING FORWARD OR BACKWARDS OR TO BE OFFSET SIDE TO SIDE.

- SAFE EASY TO USE OPERATION WITH MULTIPLE OPERATORS - A PUSH BUTTON REMOTE CONTROL PENDANT HAS AN EMERGENCY BUTTON AND A LOCKABLE ACTIVATION KEY.
- EUROPEAN ENGINEERING AND DESIGN EXPERTISE - OMER PARK HAS ALONG HISTORY DESIGNING PARKING LIFTS FOR USE AROUND THE WORLD. PRODUCTS ARE DESIGNED AND BUILT TO COMMERCIAL STANDARDS TO BE USED BY PRIVATE CITIZENS RATHER THAN REPAIR TECHNICIANS.
- VEHICLES STORED BOTH TOP AND BOTTOM ARE FULLY PROTECTED - THE LARGE GALVANIZED DECK PROTECTS THE COMPLETE FOOT PRINT OF THE VEHICLE ELIMINATING THE NEED FOR DRIP TRAYS

ADDITIONAL FEATURES




COMPACT DESIGN WITH GALVANIZED DECK PROTECTS LOWER VEHICLE AND PROVIDES THE ULTIMATE CORROSION PROTECTION



HIGH EFFICIENCY 2HP / 1.5KW SINGLE PHASE MOTOR AND PUMP WITH KEY LOCK REMOTE PENDANT CONTROL

EQUIPMENT FOOTPRINT

SPECIFICATIONS

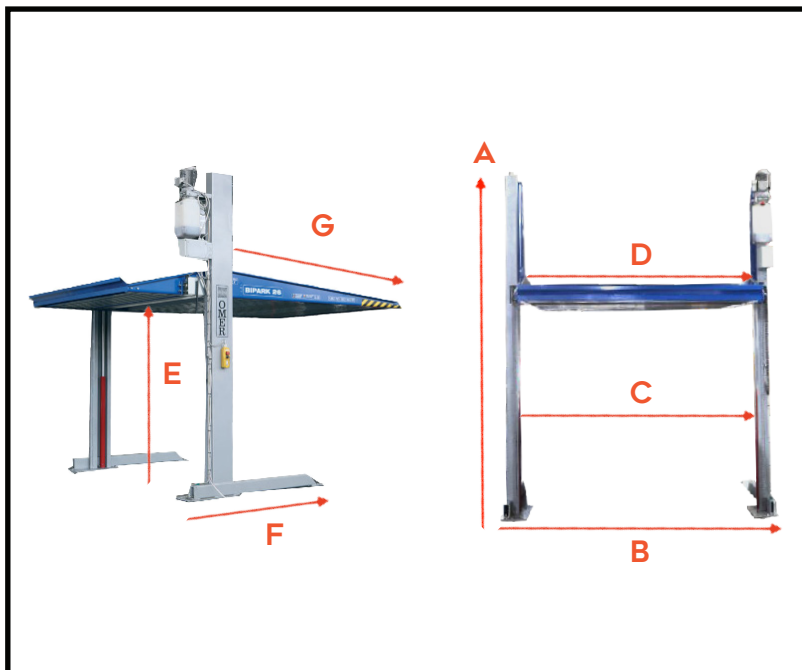

2 POST PARKING LIFT SPECIFICATIONS			
CAPACITY	5,720 LB. / 2.6T	5,720 LB. / 2.6T	7,048 LB. / 3.2T
PARKING TYPE	2 POST DRIVE ON	2 POST DRIVE ON	2 POST DRIVE ON
OVERALL HEIGHT	118" (3000MM)	134.6" (3420MM)	134.6" (3420MM)
OVERALL WIDTH	104.4" (2602MM)	104.4" (2602MM)	104.4" (2602MM)
WIDTH BETWEEN COLUMNS	91.2" (2317MM)	91.2" (2317MM)	91.2" (2317MM)
DRIVE THRU WIDTH	88.7" (2252MM)	88.7" (2252MM)	88.7" (2252MM)
LIFTING HEIGHT UNDER DECK	70.9" (1800MM)	80.7" (2050MM)	80.7" (2050MM)
LOWERED HEIGHT	3.1" / 78 MM	3.1" / 78 MM	3.1" / 78 MM
LENGTH OF FLOOR OUTRIGGER ARMS	65.5" (1665MM)	65.5" (1665MM)	65.5" (1665MM)
WIDTH OF DECK	82.7" (2100MM)	86.6" (2200MM)	94.5" (2400MM)
LENGTH OF DECK	142.5" (3619MM)	142.5" (3619MM)	142.5" (3619MM)
LIFTING TIME	45 SECONDS	50 SECONDS	55 SECONDS
STANDARD POWER REQUIREMENTS	220V-60HZ-1PH-20 AMP 2 HP	220V-60HZ-1PH-20 AMP 2 HP/ 1.5KW	220V-60HZ-1PH-20 AMP 2HP/ 1.5KW
SHIPPING WEIGHT	2,247 LB. / 1020 KG.	2,643 LB. / 1200 KG.	2,863 LB. / 1300 KG.
TLS PART #	TLSP2P57	TLSP2P57W	TLSP2P70

DISCLAIMER: TLS INC. IS CONSTANTLY UPDATING THEIR PRODUCTS TO MAINTAIN THE HIGHEST POSSIBLE STANDARDS OF PERFORMANCE AND SAFETY. THE SPECIFICATIONS INCLUDED IN THIS BROCHURE ARE ONLY ACCURATE AT THE TIME OF PRINTING AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.

CONTACT US NOW

866-799-LIFT



THE LIFTSUPERSTORE
HEADOFFICE & MANUFACTURING
2300 SPEERS RD OAKVILLE ONTARIO



AUTHORIZED TLS DISTRIBUTORS LOCATED: ALABAMA, ARIZONA, CALIFORNIA, FLORIDA, TEXAS, INDIANA, KANSAS, NEW ENGLAND, NEW HAMPSHIRE, WISCONSIN, MISSOURI, & VIRGINIA