



CALL 866-799-LIFT

WWW.LIFTSUPERSTORE.COM

LSSSL12FD/14FD/16FD


SPACE LOGIC SERVICE SCISSOR LIFTS

RUSTPROOFING, OIL CHANGES OR WASHBAY TRACTION DECK
GENERAL SERVICE

12,000, 14,000 OR 16,000 LB. / 5.4T, 6.4T
OR 7.3T CAPACITY



12,000LB./5.4T OR
14,000 LB. 6.4T
CAPACITY



16,000 LB. 6.4T CAPACITY

POWDER COAT FINISHED
EXPANDED METAL DECK
SURFACE



THE LIFTSUPERSTORE AND ALL ITS REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP.
PLEASE CALL US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS.
WWW.TLSLIFTS.COM

ADDITIONAL FEATURES

September 2023




SCISSOR RACK AND PINION
STYLE GEAR RACK



DOUBLE WALL 26" 660 MM WIDE
TRACTION SURFACE RUNWAYS


OPTIONAL ACCESSORIES

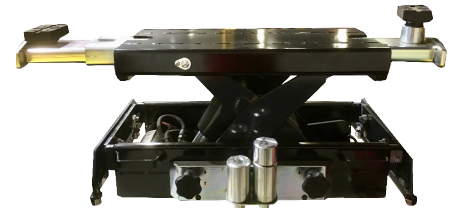

PREMIUM "HEAVY DUTY" 6,000 LB. (2.7T), 7,000 LB. (3.2T) OR 8,000 LB. (3.6T) JACKING BEAMS WITH 5 YR. PARTS WARRANTY #TLS-RJ8HD, TLS-RJ7HD, TLD-RJ6HD




HEAVY DUTY 25 GALLON (100 L) WASTE OIL
DRAIN WITH ANTI SLOSH BAFFLES #TLSDRWOD



SHATTERPROOF 24V LED LIGHTING KIT SHUTS
OFF AUTOMATICALLY BEFORE REACHING THE
FLOOR #TLSLED



BUILT IN RUNWAY AIR INFLATION HOSES TLSTIL

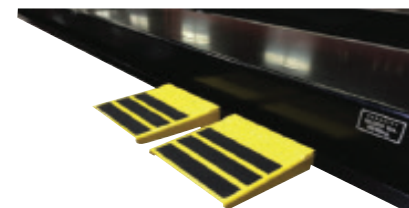

REMOVEABLE RUNWAY STEP PLATFORMS WITH
NON SLIP SURFACE #TLSMWS

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

SCISSOR FLAT DECK SERVICE LIFT -
"SPACE LOGIC"
12,000, 14,000 OR 16,000 LB. / 6.8T
CAPACITY



LSSSL12FD
LSSSL14FD
LSSSL16FD

CATEGORY				
	CAPACITY	12,000 LB. (5.4T)	14,000 LB.(6.4T)	16,000 LB.(7.3T)
	NO TIE BAR OR OBSTRUCTION BETWEEN RUNWAYS	YES - OPEN FRONT & REAR	YES - OPEN FRONT & REAR	YES - OPEN FRONT & REAR
A	RAISED HEIGHT	74" (1880MM)	74" (1880MM)	74" (1880MM)
B	LOWERED HEIGHT	10 3/4" (273MM)	10 3/4" (273MM)	10 3/4" (273MM)
C	OVERALL LENGTH STANDARD	242 3/4" (6166MM)	260 3/4" (6623MM)	260 3/4" (6623MM)
D	DECK LENGTH STANDARD	185" (4700MM)	203" (5156MM)	203" (5156MM)
E	WIDTH BETWEEN RUNWAYS	41" (1041MM)	41" (1041MM)	41" (1041MM)
F	RUNWAY DECK WIDTH	26" (660MM)	26" (660MM)	26" (660MM)
G	OVERALL WIDTH FRONT/REAR	91 1/2" (2324MM)	91 1/2" (2324MM)	91 1/2" (2324MM)
	MIN. 4 WHEEL ALIGNMENT WB	84" (2234MM)	84" (2234MM)	84" (2234MM)
	MAX. 4 WHEEL ALIGNMENT WB	160" (4064MM)	160" (4064MM)	160" (4064MM)
	MAX 2 WHEEL ALIGN. WB STANDARD	167" (4242MM)	178" (4521MM)	178" (4521MM)
	LIFT TIME	58 SECONDS	58 SECONDS	58 SECONDS
	POWER REQUIREMENTS	230V 60HZ 1PH 25 AMP	230V 60HZ 1PH 25 AMP	230V 60HZ 1PH 25 AMP
	RECOMMENDED JACKING BEAM CAPACITY	6,000 LB.(2.7T)	7,000 LB. (3.2T)	8,000 LB. (3.6T)
	SHIPPING WEIGHTS	5,890 LB. (2,700 KG)	6250 LB.(2841 KG.)	6450 LB.(2931 KG.)

DISCLAIMER: TLS INC. IS CONSTANTLY UPDATING THEIR PRODUCTS TO MAINTAIN THE HIGHEST POSSIBLE STANDARDS OF PERFORMANCE AND SAFETY. THE SPECIFICATIONS INCLUDED IN THIS BROCHURE ARE ONLY ACCURATE AT THE TIME OF PRINTING AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.

POWER UNIT OPTIONS



ENCLOSED CONSOLE CONTROL




WALL/FLOOR MOUNT WITH REMOTE PENDANT

FEATURES

- BUILT TO HIGHER QUALITY STANDARD; 100% NORTH AMERICAN MADE - PREMIUM US LEESON 3HP / 2.2KW MOTOR AND HPI PUMP.
 - SUPERIOR STRUCTURAL STRENGTH PROVIDES LONGER LIFE AND MORE PRECISE ALIGNMENTS - NON FLEX DOUBLE WALL RUNWAYS WITH BUILT IN "Z" RAIL AND HEAVY DUTY 3" X 6.5" X 3/8" / 76MM X 165MM X 9.5MM WALL TUBULAR LEGS
 - GREATER FLEXIBILITY WITH MORE MODELS TO CHOSE FROM - AVAILABLE IN SURFACE OR FLUSH MOUNTED, SERVICE DECK AND A CHOICE OF FLOOR MOUNTED "CONSOLE" CONTROL OR SPACE SAVING WALL/FLOOR MOUNTED POWER UNIT WITH PENDANT CONTROL.
 - PREMIUM OPTIONS AND ACCESSORIES CAN EXPAND THE CAPABILITIES AND SERVICE LIFE - BUILT IN TIRE INFLATION HOSES, REMOVABLE WORK STEPS, LED RUNWAY LIGHTING AND PREMIUM HEAVY DUTY EXTENDED LIFE 5 YEAR WARRANTY HD JACKING BEAMS
 - LOWER MAINTENANCE COSTS -STEEL COMPONENTS ARE WHEEL-A-BRATOR
- SHOT BLASTED AND ACID WASHED BEFORE A "DOUBLE BAKE" POWDER COAT FINISH IS APPLIED. ZIRK STYLE GREASE FITTINGS AT ALL HINGE POINTS. RUNWAY UNDER REAR SLIP PLATES IS OPEN TO PREVENT WATER AND DIRT COLLECTING.
 - PRECISION LEVELLING FEATURE PROVIDES MORE ACCURATE ALIGNMENTS - PCB CONTROL WITH LINEAR TRANSDUCERS CONTROL LEVEL TO WITHIN 5/32" / 4MM. THE FULL ADJUSTABLE FLOOR MOUNTED RACK AND PINION STYLE "GEAR BLOCKS" ALLOW FOR PRECISE LEVELLING.
 - LOW PRESSURE HYDRAULICS PROVIDES LONGER LIFE - 2" X 6" / 51MM X 152MM "BREAK OUT" CYLINDERS ALLOW THE 25" X 4-1/2" / 635MM X 114MM ID CYLINDERS TO OPERATE AT <2500 PSI UNDER FULL LOAD.
 - DESIGNED FOR GREATER TECHNICIAN PRODUCTIVITY - THERE ARE NO OBSTRUCTIONS BETWEEN THE RUNWAYS OR BASE FRAME. THE LIFT RISES 74" / 1880MM IN 58 SECONDS WITH 20 LOCKING POSITIONS. BUILT IN RUNWAY COMPRESSED AIR OUTLETS FRONT AND REAR.

EQUIPMENT FOOTPRINT

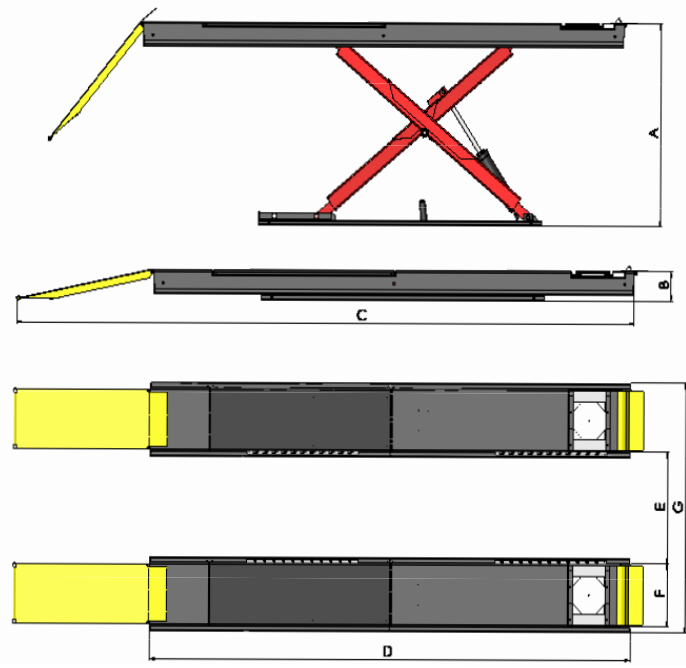

CONTACT US NOW

866-799-LIFT

THE LIFTSUPERSTORE
HEADOFFICE & MANUFACTURING
2300 SPEERS RD OAKVILLE ONTARIO

AUTHORIZED TLS DISTRIBUTORS LOCATED: ALABAMA, ARIZONA, CALIFORNIA, FLORIDA, TEXAS, INDIANA, KANSAS, NEW ENGLAND, NEW HAMPSHIRE, WISCONSIN, MISSOURI, & VIRGINIA