



FOUR REGIONAL WAREHOUSES ACROSS CANADA AND GROWING

CALL 866-799-LIFT

WWW.LIFTSUPERSTORE.COM

LSS4P15FD/15FDXL

AUTOMOTIVE AND LIGHT TRUCK GENERAL SERVICE
100% DESIGNED AND BUILT IN NORTH AMERICA

PEGASUS

4 POST LIGHT DUTY COMMERCIAL
LIFT FOR SERVICING SMALL CARS
OR LIGHT TRUCKS

15,000 LB. / 6.8T CAPACITY

DOUBLE WALL RUNWAYS WITH "Z" RAILS - 2 RUNWAYS
LENGTHS TO CHOOSE FROM




LSS4P15FD
LSS4P15FDXL

AVAILABLE IN GENERAL SERVICE OR FOR WHEEL
ALIGNMENT


December 2020

THE LIFTSUPERSTORE AND ALL ITS REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP. PLEASE CALL
US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS. WWW.TLSLIFTS.COM


OPTIONAL ACCESSORIES

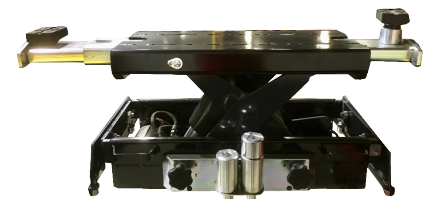


JACKING BEAM 7,500 LB. 3.4T CAPACITY
5 YR WARRANTY

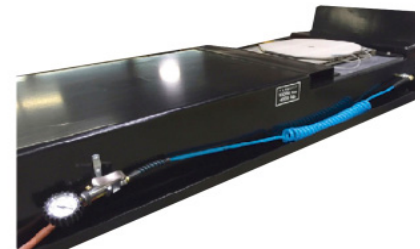

BUILT IN RUNWAY AIR INFLATION HOSES
& OPTIONAL FRONT RADIUS PLATES/REAR
SLIP PLATES

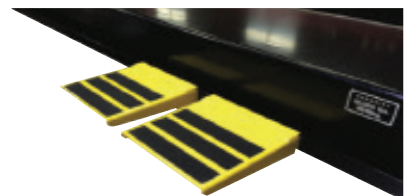

REMOVEABLE RUNWAY STEP PLATFORMS
WITH NON SLIP SURFACE

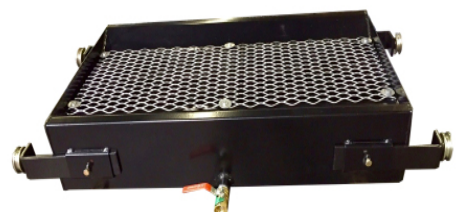

ROLLING 30 GALLON WASTE OIL
DRAIN

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

4 POST SERVICE LIFT - "PEGASUS" 15,000 LB. / 6.8T CAPACITY



LSS4P15FD
LSS4P15FDXL

CATEGORY		CLOSED FRONT FOUR POST LIGHT DUTY SERVICE LIFT
	CAPACITY	15,000 LB. (6.8T)
A	RAISED HEIGHT	75" (1905MM)
B	LOWERED HEIGHT	8 3/8" (213MM)
C	OVERALL LENGTH EXTENDED	287 1/2" (7303MM)
C	OVERALL LENGTH STANDARD	260 1/2" (6617MM)
D	DECK LENGTH EXTENDED	238" (6045MM)
D	DECK LENGTH STANDARD	214" (5359MM)
E	WIDTH BETWEEN RUNWAYS	41" (1041MM)
F	RUNWAY DECK WIDTH	23" (584MM)
G	OVERALL WIDTH FRONT/REAR	137 1/2" (3493MM)
H	MAX COLUMN HEIGHT	86" (2184MM)
	ALI CERTIFIED WITH GOLD LABEL	YES
	AVAILABLE WITH OPTIONAL ALIGNMENT RADIUS & SLIP PLATES	YES
	MAX. WHEEL BASE EXTENDED	209" / 5309MM
	MAX WHEEL WHEEL BASE STANDARD	182" / 4623MM
	LIFT TIME	70 SECONDS
	POWER REQUIREMENTS	230V - 60HZ - 1PH - 25 AMP
	JACKING BEAM CAPACITY	7,500 LB. (3.4T)
	SHIPPING WEIGHT	4750 LB. (2159 KG)

Disclaimer: TLS Inc. is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications included in this brochure are only accurate at the time of printing and are subject to change without notice.

FEATURES


- BUILT TO HIGHER QUALITY STANDARD; 100% NORTH AMERICAN MADE - PREMIUM US BUCHER 2HP / 1.5KW POWER UNIT.
- CORROSION RESISTANT PROTECTION - STEEL COMPONENTS ARE WHEEL-A-BRATOR SHOT BLASTED AND ACID WASHED BEFORE A "DOUBLE BAKE" POWDER COAT FINISH IS APPLIED.
- SUPERIOR STRUCTURAL STRENGTH PROVIDES LONGER LIFE - NON FLEX DOUBLE WALL 23" / 584MM WIDE RUNWAYS WITH BUILT IN "Z" RAIL. HEAVY DUTY 10" X 8 3/8" X 1/8" WALL / 254MM X 213MM X 3.2MM WALL COLUMNS AND 3" X 6 X 1/4" / 72MM X 210MM X 6.4MM TUBE TRAVERSE BEAMS.
- GREATER FLEXIBILITY WITH MORE MODELS TO CHOSE FROM - AVAILABLE IN TWO RUNWAY LENGTHS WITH BUILT IN WHEEL ALIGNMENT OR SERVICE DECK. LIFT CAN BE ORDERED IN RED OR BLUE.
- PREMIUM OPTIONS AND ACCESSORIES CAN EXPAND THE CAPABILITIES AND SERVICE LIFE - BUILT IN TIRE INFLATION HOSES, REMOVABLE WORK STEPS, LED RUNWAY LIGHTING AND PREMIUM LONG LIFE 5 YEAR WARRANTY HD JACKING BEAMS
- LOWER MAINTENANCE COSTS - ZIRK STYLE GREASE FITTINGS AT ALL 1 1/2" / 38MM PLATED HINGE PINS.
- EXTENDED LIFE "NON TWIST" CABLE DESIGN - MACHINED STEEL NICKEL PLATED 9" / 229MM PULLEYS WITH BRONZE SELF LUBRICATING BUSHINGS. NON SPIN FATIGUE RESISTANT 1/2" / 12.3 MM CABLES ARE ROUTED ON DOUBLE STACKED PULLEYS (VERSUS FOUR STACKED) TO REDUCE STRESS AND WEAR.
- LOW PRESSURE HYDRAULICS PROVIDES LONGER LIFE - 4" ID X 65" / 102MM ID X 1651MM CYLINDER IS MOUNTED UNDER THE RUNWAY AND USE A PREMIUM "PARKER" SEAL AND WEAR RING WITH CHROME PLATED PLUNGER SHAFT.
- DESIGNED FOR OPTIMUM PRODUCTIVITY - SINGLE POINT CONTROL WITH STAINLESS STEEL CYLINDER AIR RELEASES ENGAGE 11 LOCKING POSITIONS. ADJUSTABLE LOCKING LADDERS 81" X 6" X 5/16" 2057MM X 70MM X 7.9 MM THICK ALLOW FOR ACCURATE LEVELLING. POWER UNIT CAN BE MOUNTED ON A FRONT OR REAR COLUMN. BUILT IN RUNWAY COMPRESSED AIR OUTLETS FRONT AND REAR

ADDITIONAL FEATURES

EQUIPMENT FOOTPRINT



PREMIUM 9" (229MM) PULLEY AND
CABLES 1/2" (12.3MM) CABLES

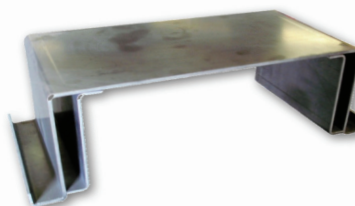


DOUBLE WALL DECK WITH Z RAIL



NORTH AMERICAN "BUCHER"
2 HP POWER UNIT



INCLUDES AIR REGULATOR
WATER TRAP OILER

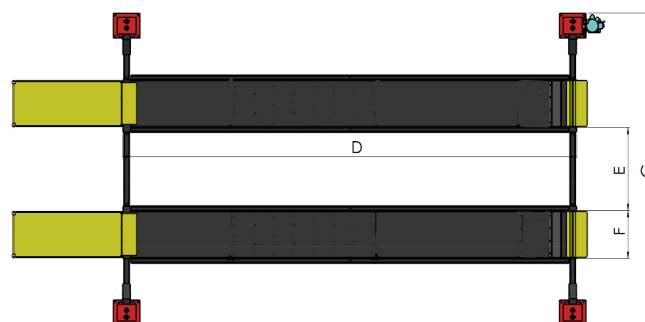

THE LIFTSUPERSTORE
RETAIL LOCATIONS THROUGHOUT THE USA &
CANADA
HEAD OFFICE & MANUFACTURING CENTRE
2300 SPEERS ROAD, OAKVILLE ONTARIO,

THE LIFTSUPERSTORE AND ALL IT'S REGISTERED
TRADE MARKS ARE PART OF THE TLS LIFT GROUP.
PLEASE CALL US FOR PRODUCT INFORMATION ON
COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS.

December 2020