



CALL 866-799-LIFT

WWW.LIFTSUPERSTORE.COM

LSS2P10CFCCT

AUTOMOTIVE AND LIGHT TRUCK GENERAL SERVICE
LIFTSUPERSTORE LIFTS INCLUDE NORTH AMERICAN KEY COMPONENTS

DEUCE

10,000 LB. / 4.5T CAPACITY"

"FLEX-METRIC" - ASYMMETRIC OR SYMMETRIC LIFTING
3 PIECE ARMS FRONT AND REAR



LSS2P10CFCCT

INCLUDED FEATURES AND ACCESSORIES




Set of 4

DROP IN SCREW ADJUSTMENT STYLE LIFTING PADS



3 PIECE, OFFSET ARMS FRONT & REAR "FLEXMETRIC" STYLE ASYMMETRIC OR SYMMETRIC LOADING

OPTIONAL ACCESSORIES



Complete Set

HEIGHT ADAPTERS #LSS2PTA4-2



Set of 2

GM TRUCK 7" (177.8MM) PADS #LSSGMTA



Set of 4

TESLA ADAPTERS S&X MODELS #LSS2PMD5-X



Set of 4

TESLA ADAPTERS MODEL 3 #LSS2PMD3

THE LIFTSUPERSTORE AND ALL IT'S REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP. PLEASE CALL US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS. WWW.TLSLIFTS.COM

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

2 POST - DEUCE
10,000 LB. / 4.5T
FLEX-METRIC
OR SYMMETRIC MODELS



10K / 4.5T
LSS2P10CFCCT

SPECIFICATIONS & FEATURES


SPECIFICATIONS		
	CAPACITY	10,000 LB. / 4.5T
A	OVERALL HEIGHT (FIELD ADJUSTABLE)	138" OR 148" / 3505MM OR 3759MM
B	OVERALL WIDTH	135-1/2" / 3429MM
C	WIDTH BETWEEN COLUMNS	112-3/4" / 2845MM
D	DRIVE THRU WIDTH	92" / 2337MM - SYMMETRIC 100" / 2540MM
E	UNDER BAR CLEARANCE (FIELD ASJUSTABLE)	131" OR 141" / 3327MM OR 3581MM
F	HEIGHT TO LOWERED LIFT PAD	4" / 102MM
G	RAISED HEIGHT WITH STANDARD PAD	76" / 1930MM
H	RAISE HEIGHT WITH ADAPTERS	87" / 2210MM
	LIFTING TIME	55 SECONDS
I	FRONT ARM REACH	19-3/4" TO 42" / 502MM TO 1067MM - SYMMETRIC 35" TO 60" / 889MM TO 1524MM
J	REAR ARM REACH	35" TO 60" / 889MM TO 1524MM
	ALI CERTIFIED WITH GOLD LABEL	YES
	STANDARD POWER REQUIREMENTS	230 VOLTS - 50/60 HZ - 1 PH - 20AMP
	SHIPPING WEIGHT	1,980 LBS. / 900 KG.
	MODEL: LSS2P10CFCCT	FLEXMETRIC (SEE DRAWING BELOW)
	SYMMETRIC & EXTRA TALL VERSIONS	AVAILABLE IN REQUEST

FEATURES

- STRONGER AND MORE STABLE STRUCTURE - UP TO 20% HEAVIER THAN MANY COMPETITORS. TWO (2) 1 1/2" X 2 1/2" / 51MM X 64MM REINFORCEMENT TUBES ARE WELDED INSIDE THE 11" X 7" WITH 1/4" WALL / 279MM X 178MM WITH 6MM WALL COLUMNS TO PROVIDE BETTER STABILITY WITH HEAVIER LOADS.
- CORROSION RESISTANT PROTECTION - STEEL COMPONENTS ARE WHEEL-A-BRATOR SHOT BLASTED AND ACID WASHED BEFORE A "DOUBLE BAKE" POWDER COAT FINISH IS APPLIED.
- LIFTS HIGHER TO PROVIDE MORE UNDER CAR WORK AREA - THE 70-1/2" / 1791MM LONG CYLINDER STROKE PROVIDES 76" / 193MM LIFT WITHOUT ADAPTERS WITH A MAXIMUM ATTAINABLE LIFT HEIGHT OF 87" / 2210 MM.
- FLEXIBLE VEHICLE LOADING - FLEXMETRIC ARM DESIGN USES THREE (3) PIECE "OFFSET" FRONT AND STRAIGHT (3)PIECE REAR LIFTING ARMS FOR OPTIMUM ASYMMETRIC AND SYMMETRIC LOADING OPPORTUNITIES.
- REDUCED INSTALLATION COSTS - FIELD ADJUSTABLE HEIGHT CAN EASILY ADAPT TO MOST CEILING HEIGHT INSTALLATION DIMENSIONS.
- PREMIUM NORTH AMERICAN COMPONENTS - NORTH AMERICAN MADE BUCHER 2HP / 1.5KW POWER UNIT, 3/8" / 9.5MM EQUALIZING CABLES AND 2" / 51MM ID HYDRAULIC CYLINDERS PROVIDE LONGER MORE DEPENDABLE SERVICE LIFE.
- REDUCED VEHICLE SETUP TIME - ACME SCREW "DROP IN" STYLE LIFT PADS HAVE A LOWERED HEIGHT WITH RUBBER PAD OF 4" / 102MM AND CAN BE EXTENDED BY 3" / 76MM OR 6" / 152MM USING NICKEL PLATED DROP IN ADAPTERS. POWER UNIT CAN BE INSTALLED ON EITHER COLUMN.
- QUIETER OPERATION LESS THAN 75 DECIBELS - RUBBER MOUNTING GROMMETS REDUCE POWER UNIT NOISE.
- CAR DOOR PROTECTION - 11" X 2" / 279MM X 51MM RUBBER DOOR BUMPERS ARE MOUNTED ON THE FACE OF BOTH LIFTING CARRIAGES TO REDUCE DOOR DAMAGE.
- MORE MODELS TO CHOSE FROM - STANDARD FLEXMETRIC DESIGN WITH 3 PIECE LIFTING ARMS, SYMMETRIC VERSION WITH EQUAL LENGTH STRAIGHT ARMS, EXTENDED HEIGHT 172" / 4389MM AND CHOICE OF RED OR BLUE.

Disclaimer: TLS Inc. is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications included in this brochure are only accurate at the time of printing and are subject to change without notice.

EQUIPMENT FOOTPRINT

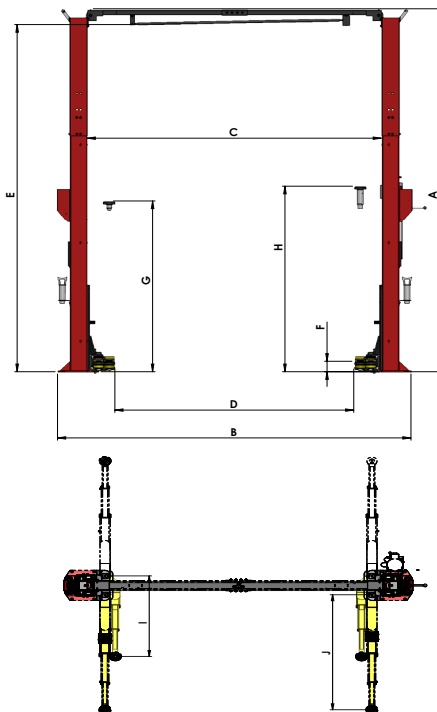

ADDITIONAL FEATURES



- ▲ 3/8" / 9.5MM NON FATIGUE CABLES WITH 3 1/2" / 111MM PULLEYS



- ▲ 2.5" X 1.5" (63MM X38MM) COLUMN REINFORCEMENT TUBE



- ▲ SINGLE POINT LOCK RELEASE



THE LIFTSUPERSTORE
RETAIL LOCATIONS THROUGHOUT THE USA & CANADA

HEAD OFFICE & MANUFACTURING CENTRE
2300 SPEERS ROAD, OAKVILLE ONTARIO,

December 2020

THE LIFTSUPERSTORE AND ALL IT'S REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP. PLEASE CALL US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS.