

AUTOMOTIVE AND LIGHT TRUCK GENERAL SERVICE
100% DESIGNED AND BUILT IN NORTH AMERICA

PEGASUS

4 POST SERVICE LIFT
15,000 LB. / 6.8T CAPACITY
DOUBLE WALL RUNWAYS WITH "Z" RAILS,




The Liftsuperstore and all it's registered trade marks are part of the TLS Lift Group. Please call us for product information on commercial and heavy duty lift products. www.tslifts.com

OPTIONAL ACCESSORIES



▲
Jacking beam TLS-RJ75

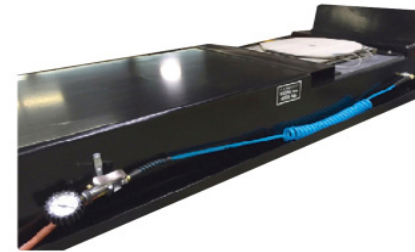

▲
Built in runway air inflation hoses



▲
Rolling waste oil drain

SPECIFICATIONS	
Capacity	15,000 lbs / 6.8T
Overall Length Extended Model	285-1/8" / 7242 mm
Overall Length Standard Model	257-7/8" / 6550 mm
Deck Length Extended Model	237" / 6020mm
Deck Length Standard Model	210" / 5334mm
Overall Width	137-1/2" / 3493mm
Deck Width	23" / 584mm
Lowered Height	7-3/4" / 197mm
Raised Height	74" / 1880mm
Structural Finish	Double bake powder coat
Lifting System	Single hydraulic cylinder with 4 9/16" / 14mm lifting cable
Warranty	2 years on parts
Max. Service WB	232" or 205" / 5892mm or 5207mm
Lift Time	70 seconds
Power Requirement	230V - 60Hz - 1 Ph - 20amp
Shipping Weight	5,000 lb. / 2.3T
Part Number	LSS4p15FD / LSS4P15FDXL


FEATURES

- Built to higher quality standard; 100% North American made - premium US Bucher 2HP / 1.5kw power unit.
- Corrosion resistant protection - steel components are wheelabrator shot blasted and acid washed before a "double bake" powder coat finish is applied.
- Superior structural strength provides longer life - Non flex double wall 23" / 584mm wide runways with built in "Z" rail. Heavy duty 10" x 8-3/8" x 1/4" wall / 254mm x 213mm x 6mm wall columns and 3" x 8-1/4" / 72mm x 210mm tube traverse beams.
- Greater flexibility with more models to choose from - Available in two runway lengths. Lift can be ordered in red or blue.
- Premium options and accessories can expand the capabilities and service life - built in tire inflation hoses, removable work steps, LED runway lighting and premium long life 5 year warranty HD jacking beams
- Lower maintenance costs - Zirk style grease fittings at all 1-1/2" / 38mm plated hinge pins.
- Extended Life "Non Twist" Cable design - Machined steel nickel plated 9" / 229mm pulleys with bronze self lubricating bushings. Non spin fatigue resistant 9/16" / 14mm cables are routed on double stacked pulleys (versus four stacked) to reduce stress and wear.
- Low pressure hydraulics provides longer life - 4" ID x 65" / 102mm ID x 1651mm cylinder is mounted under the runway and use a premium "Parker" seal and wear ring with chrome plated plunger shaft.
- Designed for optimum productivity - Single point control with stainless steel cylinder air releases engage 12 locking positions. Adjustable locking ladders 81" x 2-3/4" x 3/8" / 2057mm x 70mm x 9.5mm thick allow for accurate levelling. Power unit can be mounted on a front or rear column. Built in runway compressed air outlets front and rear.

ADDITIONAL FEATURES



Pulley and cables




Double wall deck with Z rail



Includes air regulator water trap oiler

EQUIPMENT FOOTPRINT

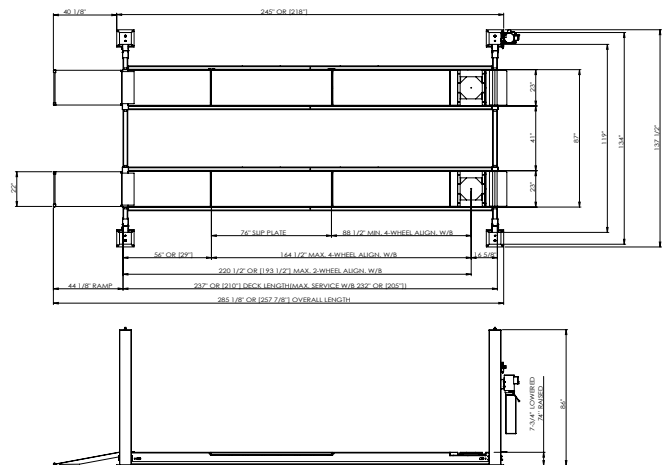

NOTE: ALL CHANGES THAT ARE MADE TO THIS PRODUCT WILL CHANGE THE REVISION REVISION TABLE SHALL REFLECT THE CHANGES FOR INSPECTOR

MOTOR: 2HP - 230V 1PH 60HZ
AMP DRAW: 14.5AMP FULL CAPACITY
AIR: 150 PSI
OPERATING PRESSURE@FULL LOAD: 2750 PSI
RAISE TIME: 76 SECONDS
LOWER TIME: 37 SECONDS
REV: A-01 AS TESTED

CONTACT US NOW

WWW.LIFTSUPERSTORE.COM OR CALL (866) 799-5438