



CALL 866-799-LIFT

WWW.LIFTSUPERSTORE.COM

LSS4P8PL/9PL

THE "ORIGINAL" STORAGE SOLUTION

8,000 LB. (3.6T) OR 9,000 LB. (4T) CAPACITY

"RESTOMOD" BUILT WITH REINFORCED COLUMNS

"RESTOMOD" - PARK YOUR CARS OR STORE YOUR TOYS

THE RESTOMOD LIFT DOUBLES YOUR GARAGE FLOOR STORAGE CAPABILITY WHEN SEASONAL SPORTS AND OUTDOOR EQUIPMENT IS STORED ABOVE YOUR PARKED CAR.



"RESTOMOD" DIFFERENCE

MANUALLY WELDED LOCKS BUILT INTO THE COLUMN TO GREATLY ENHANCE STABILITY. RESTOMOD IS DESIGNED TO LAST LONGER.



RESTOMOD PARKING STORAGE 8000LB (3.6T) OR 9,000LB. (4T)
RESTOMOD IS THE ORIGINAL PARKING LIFT DESIGN WITH MANUALLY WELDED LOCKS BUILT INTO EACH COLUMN FOR EXTRA STRENGTH. THE 4 POST RESTOMOD SERIES IS THE ORIGINAL LIFT DESIGN FOR USE IN BOTH RESIDENTIAL AND COMMERCIAL APPLICATIONS.



CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

4 POST PARKING STORAGE LIFT

8,000 LB. (3.6T) OR 9,000 LB.



RESTOMOD DX LSS4P8PL
RESTOMOD XL LSS4P9PL

FEATURES


- LOW MAINTENANCE PROBLEM FREE DESIGN - 70" / 1778MM STROKE 3" / 76MM HIGH PRESSURE CYLINDER MOUNTED UNDER RUNWAY WITH PRE-STRESSED 3/8" / 9.5MM LIFTING CABLES AND 4" / 102MM STEEL PULLEYS. TOUGH WHEEL-BRATOR FINISHED STEEL STRUCTURE WITH PREMIUM DOUBLE BAKE FINISH.
- GREATER STRUCTURAL STABILITY - "BLOCK" STYLE MECHANICAL LOCKS ARE WELDED INTO THE INSIDE FACE OF THE COLUMNS CREATING GREATER STRENGTH AND STABILITY. SINGLE POINT AUTOMATIC "DEADMAN" SAFETY LOCKS SPACED EVERY 4 1/4" / 108 MM.
- LIFTS HIGHER TO PROVIDE MORE UNDER CAR WORK AREA - PROVIDES 71" / 1803MM OR 77" / 1956MM UNDER DECK CLEARANCE TO ACCOMMODATE STANDARD HEIGHT CARS, TRUCKS AND SUV'S.
- FLEXIBLE VEHICLE LOADING - LOW TO THE FLOOR 4.3" / 109MM DECK HEIGHT WITH LOW ANGLE REMOVABLE APPROACH RAMPS ACCOMMODATES EXOTIC SPORTS CARS AND VEHICLES WITH LOW CLEARANCE GROUND EFFECTS. RUNWAYS 18.7" / 475MM WIDE ARE ADJUSTABLE FROM 74 7/8" / 1902MM TO 80.7" / 2050MM WIDE.
- PREMIUM NORTH AMERICAN COMPONENTS - NORTH AMERICAN MADE MONARCH (BUCHER) POWERUNIT, 3/8" / 9.5MM EQUALIZING CABLES, CYLINDERS AND HOSES.
- MORE MODELS TO CHOSE FROM - 8,000 OR 9,000 LB. / 3.6T OR 4T CAPACITIES WITH LIFTING HEIGHTS OF EITHER 74.8" OR 82.3" / 1900MM TO 2090MM AND RUNWAYS 170" OR 185" / 4318MM OR 4699MM. POWER UNITS AVAILABLE IN HIGH EFFICIENCY 220V SINGLE PHASE 2HP / 1.5KW 8 AMP OR CONVENIENT 110V SINGLE PHASE 1HP / .75KW 15 AMP.

DISCLAIMER: TLS INC. IS CONSTANTLY UPDATING THEIR PRODUCTS TO MAINTAIN THE HIGHEST POSSIBLE STANDARDS OF PERFORMANCE AND SAFETY. THE SPECIFICATIONS INCLUDED IN THIS BROCHURE ARE ONLY ACCURATE AT THE TIME OF PRINTING AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TECHNICAL SPECIFICATIONS

| RESTOMOD PARKING / STORAGE LIFT | | |
|----------------------------------|--|--|
| CAPACITY | 8,000 LBS / 3.6T | 9,000 LBS / 4T |
| LENGTH (NO APPROACH RAMPS) | 175 3/8" / 4455 MM | 190 1/2" / 4839 MM |
| LENGTH OF REMOVABLE RAMPS | 36 1/4" / 921MM | 36 1/4" / 921MM |
| RUNWAY LENGTH | 170" / 4318MM | 185" / 4699MM |
| OVERALL HEIGHT OF COLUMNS | 82" / 2083MM | 92" / 2337MM |
| RUNWAY LOWERED HEIGHT | 4 3/8" / 111MM | 4 3/8" / 111MM |
| OVERALL WIDTH (NO POWER UNIT) | 104 1/2" / 2654MM | 112" / 2845MM |
| DECK WIDTH | 18 5/8" / 473.1MM | 18 5/8" / 473.1MM |
| OVERALL WIDTH OUTSIDE OF RUNWAYS | 74 7/8" / 1902MM | 80 3/4" / 2051MM |
| WIDTH BETWEEN RUNWAYS | 37 5/8" / 956MM | 43 3/8" / 1102MM |
| RAISED HEIGHT | 74 3/4" / 1899MM | 82 1/4" / 2089MM |
| ACCESSORIES INCLUDED | CASTER WHEELS, 3 STEEL DRIP & DRAIN TRAYS AND 1 STEEL JACKING TRAY | CASTER WHEELS, 3 STEEL DRIP & DRAIN TRAYS AND 1 STEEL JACKING TRAY |
| MECHANICAL LOCKING SYSTEM | LOCKING BLOCKS WELDED TO THE COLUMN FACE & SPACED EVERY 4 1/4" / 108MM APART | LOCKING BLOCKS WELDED TO THE COLUMN FACE & SPACED EVERY 4 1/4" / 108MM APART |
| POWER REQUIREMENT | 110V / 60HZ / 1 PH. - 15 AMP. OR 230V / 60HZ / 1 PH - 8 AMP | 110V / 60HZ / 1 PH. - 15 AMP. OR 230V / 60HZ / 1 PH - 8 AMP |
| SHIPPING WEIGHT | 1,630 LB. / 741 KG. | 1900 LB. / 864 KG. |
| PART NUMBER | LSS4P8PL | LSS4P9PL |


OPTIONS

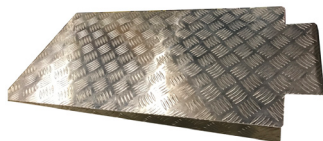

LIGHTWEIGHT ALUMINUM RAMPS



3,500 LB. (1.6T) OR 4,500 LB. (2.0T) SLIDING SCISSOR JACK



CENTER DECK PLATFORMS





4,400 LB. (2T) PORTABLE DOUBLE AIR BAG JACK



PUMP SIDE MOUNTING BRACKET

EQUIPMENT FOOTPRINT

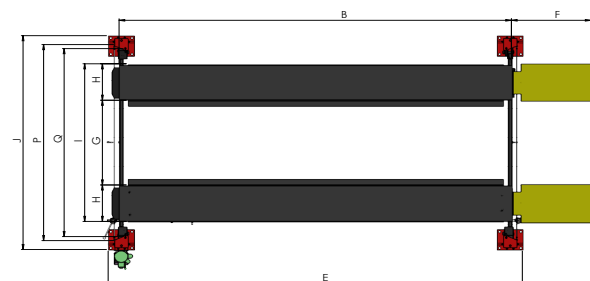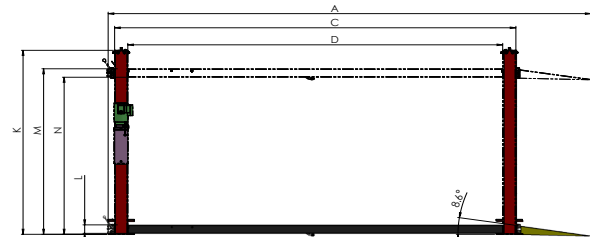

THE LIFTSUPERSTORE
RETAIL LOCATIONS THROUGHOUT THE USA & CANADA

HEAD OFFICE & MANUFACTURING CENTRE
2300 SPEERS ROAD, OAKVILLE ONTARIO,

THE LIFTSUPERSTORE AND ALL IT'S REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP. PLEASE CALL US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS.

DECEMBER 2020