



CALL 866-799-LIFT

WWW.LIFTSUPERSTORE.COM

LSS1P6PL/6PLP

STORAGE SPACE INTEGRATION

6,000 LB. (2.7T) CAPACITY SINGLE POST RAMP STYLE

2 MODELS TO CHOOSE FROM - OPEN OR CLOSED RAMP

“PARK MAGIC” STACKER - NO PULLEYS OR CABLES

6,000 LB. (2.7T) CAPACITY

PARK MAGIC



LSS1P6PL

PARKL MAGIC “PLUS”



LSS1P6PLP

PARK MAGIC PARK MAGIC “PLUS”

LESS SPACE
LESS MAINTENANCE



PREMIUM NORTH AMERICA MADE BUCHER
POWER UNIT - 220V OR 110V



110V 1 PH 60HZ 15 AMP

220V POWER
UNITS USE LESS
POWER LIFT FASTER
THAN 110V. THE
110V VERSION CAN
BE USED WITH
MOST 15 AMP HOME
CURCUITS



220V 1 PH 60HZ 11 AMP

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

1 POST STORAGE LIFT

6,000 LB. (2.7T) CAPACITY OPEN
RUNWAYS OR FULL DECK




PARK MAGIC LSS1P6PL
PARK MAGIC PLUS
LSS1P6PLP


FEATURES



THREE POWER UNIT MOUNTING
BASKETS - FRONT & SIDES OF COLUMN

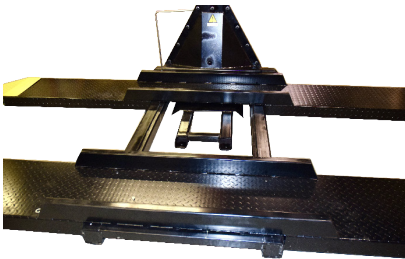

RUNWAY RUB RAILS PREVENT DRIVING
OFF PLATFORMS WHEN DRIVE ON/OFF

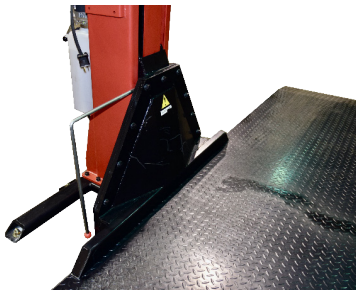

SINGLE POINT 17 POSITION
MECHANICAL LOCK RELEASE

EXPANDING YOUR PARKING OPPORTUNITIES

PARK MAGIC SINGLE POST STORAGE DRIVE ON LIFT 6,000LB (2.7T)


MEETS CONSTRUCTION AND TESTING
REQUIREMENTS FOR RESIDENTIAL
STORAGE LIFTS. THE PARK MAGIC SERIES
IS THE ULTIMATE LIFT FOR THOSE WHO
WANT DEPENDABILITY WITH A MINIMUM
OF MAINTENANCE



STRONG TUBULAR 59" (1500MM)
STEEL FLOOR OUTRIGGER BARS
ADD STABILITY



WEDGE ANCHORS & SHIMS
INCLUDED WITH LIFT

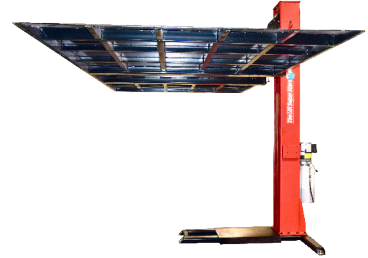

LARGE REINFORCED PLATFORM -
NO DRIP PROTECTION REQUIRED



78.7" (2000MM) CLEARANCE UNDER
DECK IS IDEAL FOR TRUCKS & SUVs



PREMIUM DOUBLE BAKE POWDER
FINISH RESISTS CORROSION

HOME STORAGE

"PARK MAGIC" - PARK YOUR CARS OR STORE

YOUR TOYS

THE PARK MAGIC STORAGE LIFT
DOUBLES YOUR GARAGE FLOOR
STORAGE CAPABILITY WHEN
SEASONAL SPORTS AND OUTDOOR
EQUIPMENT IS STORED ABOVE YOUR
PARKED CAR.



CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

1 POST STORAGE LIFT

6,000 LB. (2.7T) CAPACITY OPEN
RUNWAYS OR FULL DECK



PARK MAGIC LSS1P6PL
PARK MAGIC PLUS
LSS1P6PLP

FEATURES

6,000LB. (2.7T) CAPACITY DRIVE ON
RAMPS WITH OPEN CENTER AREA



TWO (2) MODELS
TO CHOOSE FROM


ONE SIZE
DOESN'T FIT ALL




6,000LB. (2.7T) CAPACITY WITH COMPLETE
ONE PIECE PLATFORM



PARK MAGIC

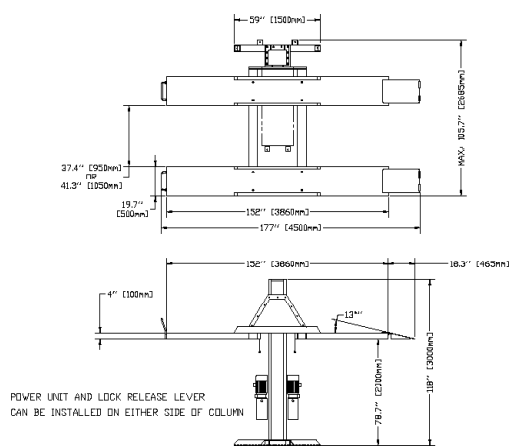

PARK MAGIC PLUS

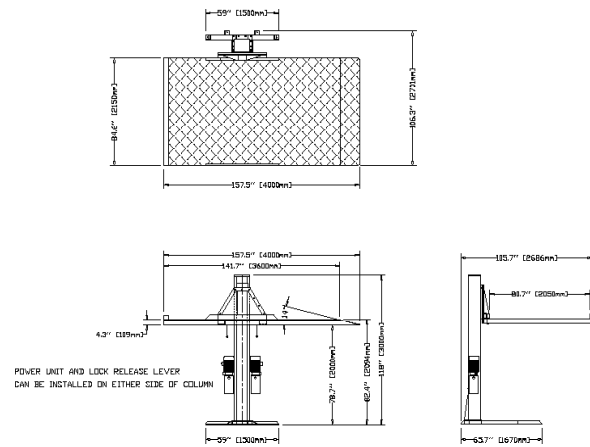

REFER TO THE SPECIFICATION CHART ON THE NEXT PAGE

- LOW MAINTENANCE PROBLEM FREE DESIGN - 52" (1321MM) LONG STROKE 3" (76MM) OD HIGH PRESSURE CYLINDER WITH HD LEAF CHAIN. TOUGH WHEEL-A BRATOR FINISHED STEEL STRUCTURE WITH PREMIUM DOUBLE BAKE FINISH. LOW MAINTENANCE DESIGN ELIMINATES ALL PULLEYS AND LIFTING CABLES. FEWER MOVING PARTS MEANS LESS MAINTENANCE AND SERVICE ISSUES.
- REDUNDANT SAFETY SYSTEMS- 17 POSITION SELF ACTIVATING MECHANICAL LOCKING SYSTEM WITH EASY TO USE RELEASE HANDLE. VELOCITY FUSED TO PROTECT AGAINST FLUID BURST. LARGE "H" SHAPED DECK STRUCTURE COMBINED WITH REINFORCED COLUMN AND BASE PROVIDE EXCELLENT STABILITY.
- LIFTS HIGHER TO PROVIDE MORE UNDER CAR WORK AREA - LIFTS 78.7" (2000 MM) UNDER LIFTING BOLSTER (WHEN SITTING ON THE TOP LOCK).

COMPACT SPACE SAVING DESIGN - LIFT VEHICLES IN BUILDINGS WITH CEILINGS AS LOW AS 10' (3048MM) . DESIGNED TO FIT MOST STANDARD GARAGE LAYOUTS WITH A COMPACT

- ACCOMODATES MOSTS CARS - DRIVE ON BACK OFF RUNWAYS 19.7" (500MM) WIDE X 152" (3860 MM) LONG. BUILT IN FOOTPRINT. RUB RAILS PREVENT VEHICLES FROM DRIVING OFF RUNWAYS. REMOVABLE FRONT WHEEL STOPS.
- FLEXIBLE VEHICLE LOADING - LOW TO THE FLOOR 4.5" (114 MM) LOWERED CLEARANCE HEIGHT. STRONG STABLE BASE FRAME PROVIDES STABILTY WHEN FULLY LOADED.
- PREMIUM NORTH AMERICAN COMPONENTS - NORTH AMERICAN MADE MONARCH (BUCHER) POWERUNIT, 110V 15 AMP 1HP (.75KW) OR 2HP (1.5KW) 220V 11 AMP 60HZ LIFTS TO FULL HEIGHT IN 45 SECONDS.



THE LIFTSUPERSTORE
RETAIL LOCATIONS THROUGHOUT THE USA &
CANADA

HEAD OFFICE & MANUFACTURING CENTRE
2300 SPEERS ROAD, OAKVILLE ONTARIO,

December 2020
THE LIFTSUPERSTORE AND ALL IT'S REGISTERED
TRADE MARKS ARE PART OF THE TLS LIFT GROUP.
PLEASE CALL US FOR PRODUCT INFORMATION ON
COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS.

1 POST STORAGE LIFT

6,000 LB. (2.7T) CAPACITY OPEN
RUNWAYS OR FULL DECK



PARK MAGIC LSS1P6PL
PARK MAGIC PLUS
LSS1P6PLP

TECHNICAL SPECIFICATIONS

MODEL NUMBER	LSS1P6PL	LSS1P6PLP
FEATURE	OPEN RUNWAYS	FULL DECK
CAPACITY	6,000 LBS / 2.7T	6,000 LBS / 2.7T
OVERALL LENGTH WITH RAMPS	177" (4500MM)	157.5" (4000MM)
RUNWAY LENGTH	152" (3860MM)	141.7" (3600MM)
DRIVE ON APPROACH ANGLE	13 DEGREES	14 DEGREES
WIDTH OF BASE WITH OUTRIGGERS	59" (1500MM)	59" (1500MM)
APPROACH RAMP LENGTH	18.3" (465MM)	15.8" (401MM)
WIDTH BETWEEN RUNWAYS	37.4" OR 41.3" (950 OR 1050MM)	N/A
RUNWAY/DECK WIDTH (INCLUDES RUB RAILS)	19.7" (500MM)	84.6" (2150MM)
WIDTH OUTSIDE RUNWAYS	76.4" OR 80.7" (1941 OR 2050MM)	N/A
OVERALL WIDTH (NO POWER UNIT)	105.7" (2685MM)	106.3" (2701MM)
COLUMN HEIGHT	118" (3000MM)	118" (3000MM)
RUNWAY HEIGHT	4-1/2" (114MM)	3 1/2" (119MM)
LIFTING HEIGHT	82.4" (2093MM)	82.4" (2093MM)
MAX. CLEARANCE (UNDER RUNWAY)	78.7" (2000MM)	78.7" (2000MM)
POWER SUPPLY	110V 15 AMP 1HP .75KW 220V 8 AMP 2HP 1.5KW	110V 15 AMP 1HP .75KW 220V 8 AMP 2HP 1.5KW
PUMP & MOTOR LOCATION	FRONT, BACK OR SIDE OF COLUMN	FRONT, BACK OR SIDE OF COLUMN
MECHANICAL LOCKING SYSTEM	SINGLE POINT LOCK RELEASE WITH 17 LOCK POSITIONS	SINGLE POINT LOCK RELEASE WITH 17 LOCK POSITIONS
SHIPPING WEIGHT	2250 LB. / 1023KG	2650 LB. / 1205 KG
CONCRETE REQUIRED	6" (152.4MM)	6" (152.4MM)

Disclaimer: The Liftsuperstore is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications included in this brochure are only accurate at the time of printing and are subject to change without notice.



THE LIFTSUPERSTORE
RETAIL LOCATIONS THROUGHOUT THE USA &
CANADA
HEAD OFFICE & MANUFACTURING CENTRE
2300 SPEERS ROAD, OAKVILLE ONTARIO,

December 2020
THE LIFTSUPERSTORE AND ALL IT'S REGISTERED
TRADE MARKS ARE PART OF THE TLS LIFT GROUP.
PLEASE CALL US FOR PRODUCT INFORMATION ON
COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS.