



BEST PRICE, BEST VALUE, RUGGED & SAFE.

LSS2P9CF  
LSS2P9BP  
LSS2P11CF

# THE ORIGINAL "CHAIN DRIVE "HOBBY CAR" 2 POST LIFT

## 11,000 LB. (5T) OR 9,000 LB. (4.1T) CAPACITY

### "COBRA GT" - CARS & MEDIUM DUTY TRUCKS

THE "COBRA GT" 11,000 LB. (5T) CAPACITY HAS THE LARGE COLUMN AND HEAVY ARM STRUCTURE TO SUPPORT MOST MEDIUM DUTY TRUCKS AND VANS WHILE STILL MAINTAINING A 4" / 102MM DRIVE OVER PAD HEIGHT



CARS & LIGHT TRUCKS

**COBRA GT**

### "BIG BLOCK SS" / "RAGTOP" - CARS & LIGHT DUTY TRUCKS

THE "BIG BLOCK" & "RAGTOP" 9,000 LB. (4.1T) CAPACITY LIFTS ARE IDEAL FOR THE HOBBY CAR ENTHUSIASTS LOOKING FOR A VERSATILE AND SAFE MULTI PURPOSE LIFT. FOR GARAGES WHERE LESS THAN 12' (3.6M) OF OVERHEAD CLEARANCE AVAILABLE



CLEAR FLOOR  
"FLEX-METRIC"

**BIG BLOCK SS**



LOW CEILING  
MODEL

**RAGTOP**

\* 12 TWO POST LIFT MODELS TO  
CHOOSE FROM

\* "COMMERCIAL USE" ALI CERTIFIED  
MODELS AVAILABLE IN 10, 12, 16, 18 &  
20,000 LB. CAPACITIES

### THE LIFTSUPERSTORE DIFFERENCE

COBRA/BIG BLOCK & RAGTOP FEATURES



"FLEX-METRIC" ARM DESIGN



"STACKING" HEIGHT ADAPTERS



PADDED BAR OVERHEAD  
SHUTOFF



NORTH AMERICAN  
"BUCHER" 2 HP POWER UNIT

FORK LIFT STYLE 2"  
/ 51MM WIDE LEAF  
"CHAIN OVER" 36"  
/ 914MM LIFTING  
CYLINDERS PROVIDE  
SMOOTH SAFE  
LIFTING WITH LESS  
MAINTENANCE



CONTACT US NOW [WWW.LIFTSUPERSTORE.COM](http://WWW.LIFTSUPERSTORE.COM) OR CALL 866-799-LIFT

# 2 POST HOBBY CAR LIFTS

## 9,000 LB. (4.1T) OR 11,000 LB. (5)T CAPACITY

# COBRA GT LSS2P1CF BIG BLOCK SS LSS2P9CF RAGTOP LSS2P9BP



### FEATURES

- STRONGER AND MORE STABLE STRUCTURE - BOTH THE COBRA GT & BIG BLOCK SS ARE BUILT WITH HEAVY "BOX STYLE" COLUMNS. THE LIFTS ARE DESIGNED WITH HEAVIER ARMS, COLUMNS AND CARRIAGES THAT PROVIDES THE EXTRA STRENGTH REQUIRED WHEN LIFTING LONG BOX MEDIUM DUTY TRUCKS. THE LOW DRIVE OVER HEIGHT OF 4" / 102MM ALSO ACCOMMODATES MOST CARS.
- PREMIUM NORTH AMERICAN COMPONENTS - NORTH AMERICAN MADE MONARCH (BUCHER) 2HP / 1.5KW POWER UNIT, 3/8" / 9.5MM EQUALIZING CABLES, CYLINDERS AND HOSES.
- DESIGNED TO INDUSTRY STANDARDS, THE LIFTSUPERSTORE THOROUGHLY REVIEWS ALL LIFT PRODUCTS WITH AN INDEPENDENT PANEL OF PROFESSIONAL AUTOMOTIVE TECHNICIANS TO INSURE THAT THEY MEET THE CUSTOMER EXPECTATIONS FOR QUALITY AND PERFORMANCE.
- CORROSION RESISTANT PROTECTION - STEEL COMPONENTS ARE WHEEL-A-BRATOR SHOT BLASTED AND ACID WASHED BEFORE A "DOUBLE BAKE" POWDER COAT FINISH IS APPLIED.
- LIFTS HIGHER TO PROVIDE MORE UNDER CAR WORK AREA - EXTENDED LIFTING HEIGHT (COBRA GT) PROVIDES 72" / 1829MM LIFT WITHOUT ADAPTERS WITH A MAXIMUM LIFT HEIGHT OF 78 1/2" / 1994MM.
- FLEXIBLE VEHICLE LOADING - FLEX-METRIC ARM DESIGN USE TWO (2) PIECE "OFFSET" FRONT AND STRAIGHT TWO (2) PIECE REAR LIFTING ARMS FOR OPTIMUM ASYMMETRIC AND SYMMETRIC LOADING OPPORTUNITIES.
- MORE MODELS TO CHOSE FROM - COBRA GT FOR HEAVIER VEHICLES AND RAGTOP FOR LOW CEILING, BOTH OFFER FLEXMETRIC DESIGN LIFT ARMS WITH TWO (2) PIECE OFF SET FRONT AND STRAIGHT LONG REACH REAR LIFTING ARMS. COBRA GT IS FIELD ADJUSTABLE WITH TWO OVERHEAD HEIGHT SETTINGS OF 145 1/4" OR 141 1/4" / 3689 OR 3588MM.
- BUILT TO INDUSTRY SAFETY STANDARDS - SINGLE POINT MECHANICAL LOCK RELEASE WITH LOCKS EVERY 3" / 76MM. BUILT IN FLOW CONTROL AND VELOCITY FUSE HYDRAULIC PROTECTION. PADDED BAR OVERHEAD SHUTOFF PREVENT DAMAGE TO HIGHER VEHICLES.
- REDUCED VEHICLE SETUP TIME - "DROP IN" STYLE LIFT PADS HAVE A LOWERED HEIGHT WITH RUBBER PAD OF 4" / 102MM AND CAN BE EXTENDED BY USING ANODIZED DROP IN ADAPTERS. POWER UNIT CAN BE INSTALLED ON EITHER COLUMN.
- CABLE EQUALIZED WITH 3/8" / 9.5MM PRESTRESSED CABLES AND 3" / 76MM STEEL PULLEYS WITH BRONZE SELF LUBRICATING BUSHINGS.

### TECHNICAL SPECIFICATIONS

SPECIFICATIONS				
	MODEL	COBRA GT	BIG BLOCK SS	RAGTOP CONVERTIBLE
	CAPACITY	11,000 LB. (5T)	9,000 LB. (4T)	9,000 LB. (4T)
A	OVERALL HEIGHT	145 1/4" OR 141 1/4" (3689 OR 3588MM)	143" (3632MM)	111" (2819MM)
B	OVERALL WIDTH	137 3/8" (3489MM)	135" (3429MM)	135" (3429MM)
C	WIDTH BETWEEN COLUMNS	110" (2794MM)	110" (2794MM)	110" (2794MM)
D	DRIVE THRU WIDTH	89 5/8" (2277MM)	94" (2388MM)	94" (2388MM)
E	UNDER BAR CLEARANCE (FIELD ASJUSTABLE)	137 5/8" OR 134 5/8" (3496 OR 3420MM)	135" (3429MM)	N/A
F	HEIGHT TO LOWERED LIFT PAD	4" / 102MM	4" / 102MM	4" / 102MM
G	RAISED HEIGHT WITH STANDARD PAD	72" (1829MM)	72" (1829MM)	72" (1829MM)
H	RAISE HEIGHT WITH ADAPTERS	78 1/2 (1994MM)	77" (1956MM)	77" (1956MM)
I	FRONT ARM REACH	29" TO 40" (737 TO 1029MM)	29" TO 40" (737 TO 1029MM)	29" TO 40" (737 TO 1029MM)
J	REAR ARM REACH	40 3/8" TO 57 1/4" (1026 TO 1454MM)	40" TO 57 1/2" (1016 TO 1461MM)	40" TO 57 1/2" (1016 TO 1461MM)
	MECHANICAL LOCK RELEASE	SINGLE POINT RELEASE	MANUAL EACH SIDE	MANUAL EACH SIDE
	LIFTING TIME	75 SECONDS	65 SECONDS	65 SECONDS
	ADAPTERS INCLUDED	1 1/2", 3" & 6" ( 38, 76 &152MM) SLIDING ARM ADAPTER	3" & 6" ( 76 &152MM) SLIDING ARM ADAPTER	3" & 6" ( 76 &152MM) SLIDING ARM ADAPTER
	ANCHOR BOLTS & SHIMS INCLUDED	YES	YES	YES

**DISCLAIMER: TLS INC. IS CONSTANTLY UPDATING THEIR PRODUCTS TO MAINTAIN THE HIGHEST POSSIBLE STANDARDS OF PERFORMANCE AND SAFETY. THE SPECIFICATIONS INCLUDED IN THIS BROCHURE ARE ONLY ACCURATE AT THE TIME OF PRINTING AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.**

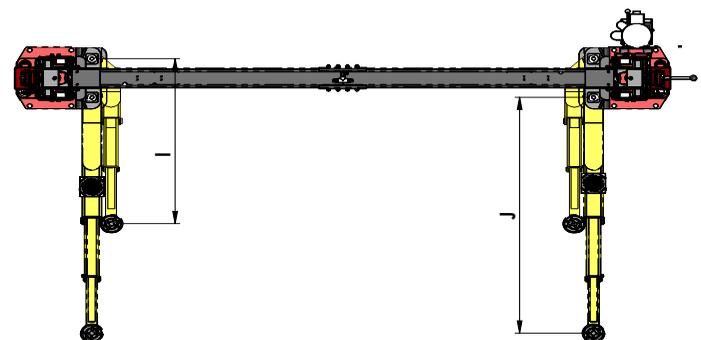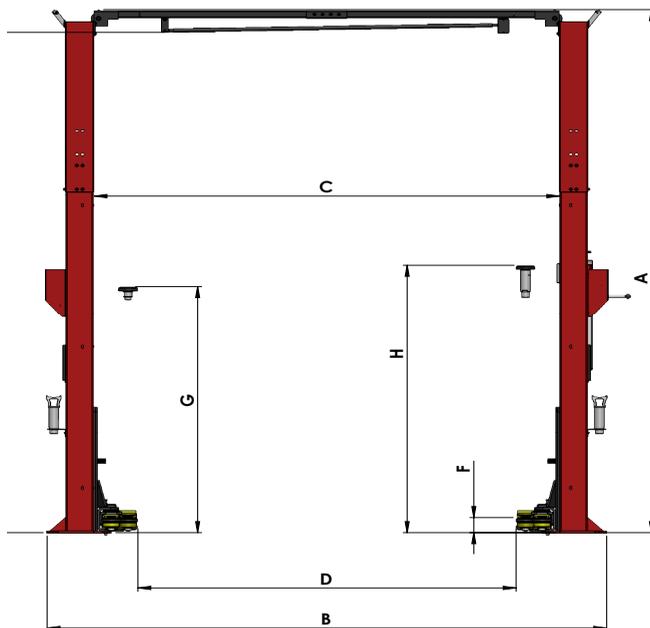

### The Liftsuperstore

Retail locations throughout the USA  
- Florida, Texas, Wisconsin, Missouri,  
Virginia & Alabama  
Call: 866-799-5438



December 2020