



LIFT IT > STORE IT > REPAIR IT

**RESTOMOD PARKING STORAGE
LSS4P8PL / LSS4P9PL**

BEST PRICE, BEST VALUE, RUGGED & SAFE.

THE "ORIGINAL" STORAGE SOLUTION

8,000 LB. (3.6T) OR 9,000 LB. (4T) CAPACITY

"RESTOMOD" BUILT WITH REINFORCED COLUMNS

"RESTOMOD" - PARK YOUR CARS OR STORE YOUR TOYS

The Restomod lift doubles your garage floor storage capability when seasonal sports and outdoor equipment is stored above your parked car.



"RESTOMOD" DIFFERENCE

**MANUALLY WELDED
LOCKS BUILT INTO THE
COLUMN TO GREATLY
ENHANCE STABILITY.
RESTOMOD IS DESIGNED
TO LAST LONGER.**



RESTOMOD PARKING STORAGE 8000LB (3.6T) OR 9,000LB. (4T)

RESTOMOD is the original parking lift design with manually welded locks built into each column for extra strength. The 4 Post Restomod series is the ORIGINAL LIFT DESIGN for use in both residential and commercial applications.



CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT (5438)

4 POST PARKING STORAGE LIFT

8,000 LB. (3.6T) OR 9,000 LB. (4T) CAPACITY

RESTOMOD DX LSS4P8PL
RESTOMOD XL LSS4P9PL

FEATURES

- Low maintenance problem free design - 70" / 1778mm stroke 3" / 76mm high pressure cylinder mounted under runway with pre-stressed 3/8" / 9.5mm lifting cables and 4" / 102mm steel pulleys. Tough wheel-a brator finished steel structure with premium double bake finish.
- Greater structural stability - "Block" style mechanical locks are welded into the inside face of the columns creating greater strength and stability. Single point automatic "deadman" safety locks spaced every 6" / 152mm.
- Lifts higher to provide more under car work area - provides 71" / 1803mm or 77" / 1956mm under deck clearance to accommodate standard height cars, trucks and SUV's.
- Flexible vehicle loading - low to the floor 4.3" / 109mm deck height with low angle removable approach ramps accommodates exotic sports cars and vehicles with low clearance ground effects. Runways 18.7" / 475mm wide
- are adjustable from 74 7/8" / 1902mm to 80.7" / 2050mm wide.
- Premium North American Components - North American made Monarch (Bucher) powerunit, 3/8" / 9.5mm equalizing cables, cylinders and hoses.
- More models to chose from - 8,000 or 9,000 lb. / 3.6T or 4T capacities with lifting heights of either 74.8" or 82.3" / 1900mm to 2090mm and runways 170" or 185" / 4318mm or 4699mm. Power units available in high efficiency 220v single phase 2HP / 1.5kw 8 amp or convenient 110v single phase 1HP / .75kw 15 amp.
- Compact space saving design - stores up to two vehicles in buildings with ceilings as low as 10' / 3048mm . Designed to fit most standard garage layouts with a footprint as small as 110" / 2800mm wide by 175" / 4445mm long

TECHNICAL SPECIFICATIONS

RESTOMOD PARKING / STORAGE LIFT		
Capacity	8,000 lbs / 3.6T	9,000 lbs / 4T
Length (no approach ramps)	175 3/8" / 4455 mm	190 1/2" / 4839 mm
Length of removable ramps	36 1/4" / 921mm	36 1/4" / 921mm
Runway length	165 3/8" / 4201mm	180 1/2" / 4585mm
Overall height of columns	82" / 2083mm	92" / 2337mm
Runway lowered height	4 3/8" / 111mm	4 3/8" / 111mm
Overall Width (no power unit)	104 1/2" / 2654mm	112" / 2845mm
Deck Width	18 5/8" / 473.1mm	18 5/8" / 473.1mm
Overall width outside of runways	74 7/8" / 1902mm	80 3/4" / 2051mm
Width between runways	37 5/8" / 956mm	43 3/8" / 1102mm
Raised Height	74 3/4" / 1899mm	82 1/4" / 2089mm
Accessories Included	Caster wheels, 3 steel drip & drain trays and 1 steel jacking tray	Caster wheels, 3 steel drip & drain trays and 1 steel jacking tray
Mechanical Locking System	Adjustable locking ladder with locks spaced every 3" apart	Adjustable locking ladder with locks spaced every 3" apart
Power Requirement	110V / 60Hz / 1 Ph. - 15 amp. or 230V / 60Hz / 1 Ph - 8 amp	110V / 60Hz / 1 Ph. - 15 amp. or 230V / 60Hz / 1 Ph - 8 amp
Shipping Weight	1,630 lb. / 741 kg.	1900 lb. / 864 kg.
Part Number	LSS4P8PL	LSS4P9PL


OPTIONS




4,400 lb. (2T) Portable Double Air Bagf




3,500 lb. (1.6T) Sliding Scissor Jack



Lightweight Aluminum Ramps





Power Unit 90 Degree Mounting Bracket



Removable Center Deck Platforms

EQUIPMENT FOOTPRINT

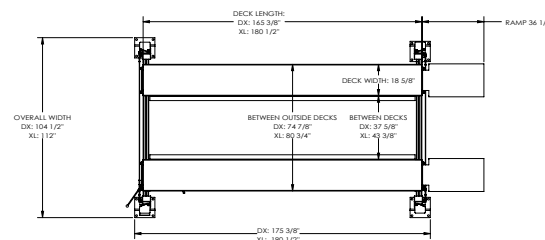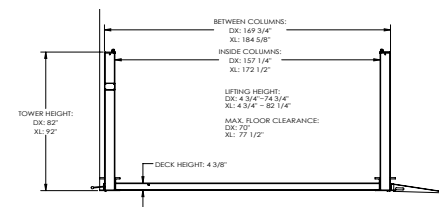

The Liftsuperstore
Retail locations throughout the USA & Canada

Head Office & Manufacturing Centre
2300 Speers Road, Oakville Ontario, L6L2X8
Call: 866-799-5438 Fax: 905-891-1214



The Liftsuperstore and all it's registered trade marks are part of the TLS Lift Group. Please call us for product information on commercial and heavy duty lift products. www.tslifts.com

JUNE 2019