



**CALL 866-799-LIFT**

[WWW.LIFTSUPERSTORE.COM](http://WWW.LIFTSUPERSTORE.COM)

LSS4P8PLDXAL  
LSS4P8PLDWA  
LSS4P8PLDTAL  
LSS4P9PLXLAL/BT

# YOUR PARKING SOLUTION HEADQUARTERS. QUATRO LIFT PARKING SOLUTION 8,000 LB. (3.6T) OR 9,000 LB. (4T) CAPACITY

**4 MODELS** TO CHOOSE FROM - HIGHER & WIDER  
“QUATRO” STACKER - OUR ALI CERTIFIED STORAGE LIFT

**8,000 LB. (3.6T)**

**QUATRO 8 STANDARD**



LSS4P8PLDXAL

**QUATRO 8 “WIDE TRACK”**



LSS4P8PLDWA

**QUATRO 8 “HIGH BOY”**



LSS4P8PLDTAL

**9,000 LB.  
CAPACITY**

IDEAL FOR TRUCKS  
& SUV'S



**QUATRO 9,000 LB. (4T) “HEAVY  
DUTY”**

**TALLER & WIDER**



LSS4P9PLXLAL



**QUATRO BOAT STORAGE LIFT**

EXTRA WIDE & TALL FOR BOAT & TRAILER



LSS4P9PLXLBT

THE LIFTSUPERSTORE AND ALL ITS REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP. PLEASE CALL US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS. [WWW.TLSLIFTS.COM](http://WWW.TLSLIFTS.COM)

October 2024

# 4 POST STORAGE LIFT

8,000 LB. (3.6T) OR 9,000 LB. (4T)  
CAPACITY



QUATRO DX LSS4P8PLDXAL  
LSS4P8PLDWAL & LSS4P8PLDTAL  
QUATRO XL LSS4P9PLXLAL  
QUATRO BT LSS4P9PLXLBT

## STORAGE

### “QUATRO” - PARK YOUR CARS OR STORE YOUR TOYS



THE QUATRO STORAGE  
LIFT DOUBLES YOUR  
GARAGE FLOOR STORAGE  
CAPABILITY WHEN  
SEASONAL SPORTS AND  
OUTDOOR EQUIPMENT  
IS STORED ABOVE YOUR  
PARKED CAR



### QUATRO STORAGE DX OR XL 8000LB (3.6T) OR 9,000LB. (4T)

CERTIFIED TO MEET OR EXCEED THE CONSTRUCTION  
AND TESTING REQUIREMENTS OF THE AUTOMOTIVE  
LIFT INSTITUTE (ALI). THE 4 POST QUATRO STACKER  
SERIES IS THE ULTIMATE LIFT FOR USE IN BOTH  
RESIDENTIAL AND COMMERCIAL APPLICATIONS.

## FEATURES



PORTABLE STEEL JACKING TRAY



REMOVABLE CASTER WHEELS



3 STEEL DRIP & DRAIN TRAYS




WEDGE ANCHORS



DIAMOND PLATE STEEL RAMPS



ADJUSTABLE LOCKING LADDERS



AUTOMATIC CABLE BREAK LOCK




REINFORCED RUNWAYS



DOUBLE BAKE POWDER COAT

## OPTIONS



LIGHTWEIGHT 36" OR 49" ALUMINUM RAMPS




3,500 LB. (1.6T) SLIDING SCISSOR JACK




REMOVEABLE CENTER PLATFORMS



4,400 LB. (2T) DOUBLE AIR BAG JACK



4,500 LB. (2.0T) SLIDING SCISSOR JACK



POWER UNIT 90 DEGREE MOUNTING

CONTACT US NOW [WWW.LIFTSUPERSTORE.COM](http://WWW.LIFTSUPERSTORE.COM) OR CALL 866-799-LIFT

# 4 POST STORAGE LIFT

8,000 LB. (3.6T) OR 9,000 LB. (4T)  
CAPACITY



QUATRO DX LSS4P8PLDXAL  
LSS4P8PLDWAL & LSS4P8PLDTAL  
QUATRO XL LSS4P9PLXLAL  
QUATRO BT LSS4P9PLXLBT

## FEATURES

8000LB. (3.6T) STANDARD DUTY EXTRA  
WIDE OR EXTRA HIGH



SIDE VIEW



PREMIUM NORTH AMERICA  
MADE BUCHER POWER UNIT  
220V OR 110V



9000LB. (4T) HEAVY DUTY  
EXTRA LENGTH & HEIGHT



TOP VIEW

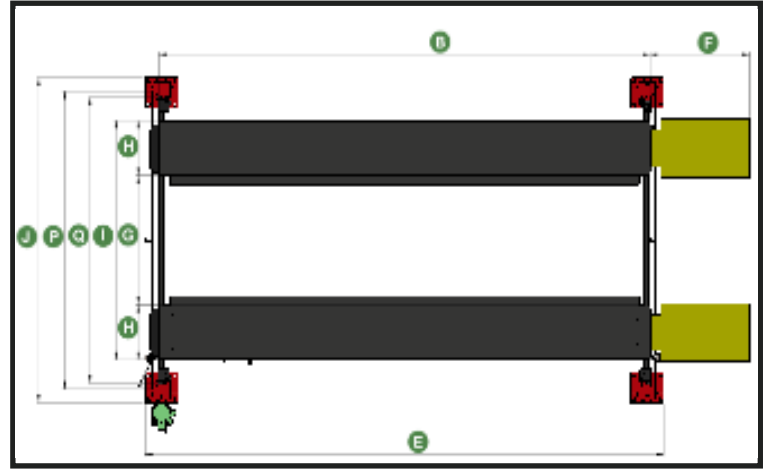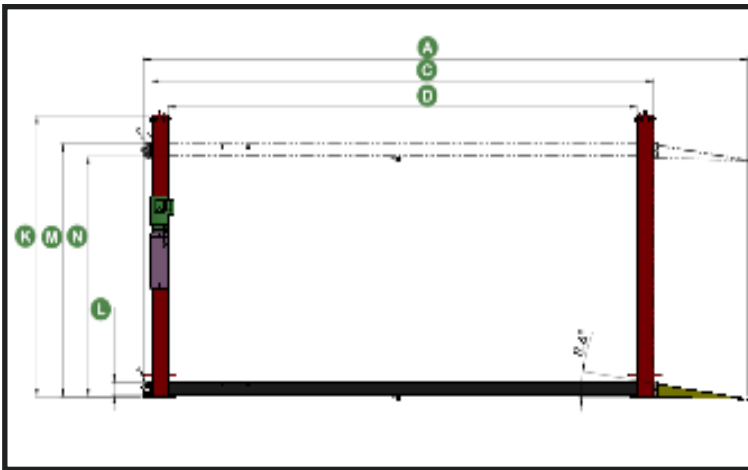

REFER TO THE SPECIFICATION CHART ON THE NEXT PAGE

- LOW MAINTENANCE PROBLEM FREE DESIGN - 72.5" (1842MM) STROKE 3" (76.2MM) DIAMETER HIGH PRESSURE CYLINDER MOUNTED UNDER RUNWAY WITH PRE-STRESSED 3/8" / 9.5MM LIFTING CABLES AND 4" / 102MM STEEL PULLEYS. TOUGH WHEEL-A BRATOR FINISHED STEEL STRUCTURE WITH PREMIUM DOUBLE BAKE FINISH.
- BUILT & TESTED TO COMMERCIAL SAFETY STANDARDS - 3RD PARTY TESTED BY M.E.T LABORATORIES TO MEET OR EXCEED THE ANSI/ALI ALCTV 2017 STANDARD. SINGLE POINT AUTOMATIC "DEADMAN" SAFETY WITH ADJUSTABLE LOCKING LADDERS.
- PREMIUM ACCESSORIES ARE INCLUDED WITH EACH LIFT - EACH LIFT COMES EQUIPPED WITH A REMOVABLE "CASTER" WHEEL KIT, THREE (3) STEEL DRIP AND DRAIN PANS AND ONE (1) HD STEEL JACKING TRAY. A 3,500 LB / 1.6T HYDRAULIC JACKING BEAM, ALUMINUM APPROACH RAMPS AND CENTRE RUNWAY STORAGE PANELS ARE AVAILABLE AS OPTIONS.
- RESIDENTIAL COMPATIBLE ENERGY EFFICIENT POWER UNITS AVAILABLE IN EITHER 2HP 220V 11 AMP OR 1HP 110V 15 AMP.
- FLEXIBLE VEHICLE LOADING - LOW TO THE FLOOR 4.3" / 111MM DECK HEIGHT WITH LOW ANGLE REMOVABLE APPROACH RAMPS ACCOMMODATES EXOTIC SPORTS CARS AND VEHICLES WITH LOW CLEARANCE GROUND EFFECTS. RUNWAYS 18.7" / 475MM WIDE. THE OVERALL WIDTH BETWEEN THE OUTSIDE OF THE RUNWAYS IS 74 7/8" (1900MM) & 80 3/4" (2054MM).
- PREMIUM NORTH AMERICAN COMPONENTS - NORTH AMERICAN MADE MONARCH (BUCHER) POWER UNIT, 3/8" / 9.5MM LIFTING CABLES, CYLINDERS AND HOSES.
- REINFORCED RUNWAYS AND COLUMNS TO IMPROVE STABILITY AND REDUCE SAGING & BENDING. VEHICLES CAN BE LIFTED UP TO FULL CAPACITY WITH WHEEL BASES 110" (2784MM) & LONGER.
- MORE MODELS TO CHOSE FROM - 8,000 LB. (3.6T) OR 9,000 LB. (4T) CAPACITIES WITH LIFTING HEIGHTS OF EITHER 77 1/4" (1962MM) OR 84 3/4" (2153MM). RUNWAYS ARE 165-3/8" (4201MM) OR 180-1/2" (4585MM) LONG. POWER UNITS AVAILABLE IN HIGH EFFICIENCY 220V SINGLE PHASE 2HP / 1.5KW 11 AMP OR CONVENIENT 110V SINGLE PHASE 1HP / .75KW 15 AMP.

CONTACT US NOW [WWW.LIFTSUPERSTORE.COM](http://WWW.LIFTSUPERSTORE.COM) OR CALL 866-799-LIFT

# 4 POST STORAGE LIFT

8,000 LB. (3.6T) OR 9,000 LB. (4T)  
CAPACITY



QUATRO DX LSS4P8PLDXAL  
LSS4P8PLDWAL & LSS4P8PLDTAL  
QUATRO XL LSS4P9PLXLAL  
QUATRO BOAT LIFT LSS4P9PLXLB

## \*\*TECHNICAL SPECIFICATIONS

	MODEL NUMBER	LSS4P8PLDXAL	LSS4P8PLDWAL	LSS4P8PLDTAL	LSS4P9PLDXAL	LSS4P9PLDXBT
	FEATURE	8K REGULAR	8K WIDE VERSION	8K TALL VERSION	9K REGULAR	9K BOAT LIFT
	CAPACITY	8,000 LBS / 3.6T	8,000 LBS / 3.6T	8,000 LBS / 3.6T	9,000 LBS / 4T	9,000 LBS / 4T
A	OVERALL LENGTH WITH RAMPS	207" (5259MM)		222-1/4" (5645MM)		
B	RUNWAY LENGTH	165-1/4" (4197MM)		180-1/2" (4585MM)		
C	FRONT TO REAR OUTSIDE COLUMNS	169-1/2" (4305MM)		184-1/2" (4686MM)		
D	FRONT TO REAR INSIDE COLUMNS	157-1/4" (3994MM)		172-1/2" (4382MM)		
E	FRONT TO REAR OUTSIDE COLUMN BASEPLATES	175-1/2" (4458MM)		190-1/2" (4839MM)		
F	APPROACH RAMP LENGTH	36-1/2" (927MM)		36-1/2" (927MM)		
G	WIDTH BETWEEN RUNWAYS	37-1/2" (953MM)	43-1/2" (1105MM)	37-1/2" (953MM)	43-1/2" (1105MM)	70" (1778MM)
H	RUNWAY WIDTH	18-3/4" (476MM)		18-3/4" (476MM)		
I	WIDTH OUTSIDE RUNWAYS	74-3/4" (1899MM)	80-3/4" (2051MM)	74-3/4" (1899MM)	80-3/4" (2051MM)	107 1/4" (2724MM)
J	OVERALL WIDTH (NO POWER UNIT)	103-1/2" (2629MM)	109-1/2" (2781MM)	103-1/2" (2629MM)	109-1/2" (2781MM)	136" (3554MM)
K	COLUMN HEIGHT	86-1/4" (2191MM)		94-1/4" (2394MM)		
L	RUNWAY HEIGHT	4-1/4" (108MM)		4-1/4" (108MM)		
M	LIFTING HEIGHT	4 3/4" (120MM) ~ 77 1/4" (1962MM)		4 3/4" (120MM) ~ 84 3/4" (2152MM)		
N	MAX. CLEARANCE (UNDER RUNWAY)	72-1/4" (1835MM)		80" (2032MM)		
P	DRIVE THRU CLEARANCE (VEHICLE PARKED UNDER RUNWAY)	94-1/2" (2400MM)	100-1/4" (2550MM)	94-1/2" (2400MM)	100-1/4" (2550MM)	126 3/4" (3175MM)
Q	DRIVE THRU CLEARANCE (VEHICLE PARKED ON RUNWAYS)	90-1/4" (2295MM)	96-1/4" (2445MM)	90-1/4" (2295MM)	96-1/4" (2445MM)	122 3/4" (3118MM)
	ACCESSORIES INCLUDED	CASTERWHEELS, 3 STEEL DRIP/DRAIN TRAYS AND 1 STEEL JACKING TRAY, 4 REMOVABLE WHEEL STOPS, STEEL APPROACH RAMPS				CASTER WHEELS & 4 WHEEL STOPS
	ALI APPROVED MECHANICAL LOCKING SYSTEM	STANDARD ON ALL MODELS				NOT ALI CERTIFIED
	POWER REQUIREMENT	110V / 60HZ / 1PH. - 15 AMP. OR 230V / 60HZ / 1PH - 11 AMP				
	SHIPPING WEIGHT	1600 LB. / 725.7 KG	1750 LB. / 793.8 KG	1800 LB. / 818 KG	1850 LB. / 839 KG	1900 LB. / 864KG.

**\*\* DISCLAIMER - SPECIFICATIONS AND PRODUCT DETAILS ARE SUBJECT TO CHANGE. FOR MORE ACCURATE TECHNICAL INFORMATION PLEASE REFER TO THE OWNERS MANUAL FOUND ON OUR WEB SITE.**

([HTTPS://LIFTSUPERSTORE.COM/WP-CONTENT/UPLOADS/2020/05/LSS-8K9K-FOUR-POST-QUADRO-STACKER-MANUAL-MAY-2023.PDFA](https://liftsuperstore.com/wp-content/uploads/2020/05/LSS-8K9K-FOUR-POST-QUADRO-STACKER-MANUAL-MAY-2023.PDFA))

**CONTACT US NOW**

**866-799-LIFT**



THE LIFTSUPERSTORE  
HEADOFFICE & MANUFACTURING  
2300 SPEERS RD OAKVILLE ONTARIO



AUTHORIZED TLS DISTRIBUTORS LOCATED: ALABAMA, ARIZONA, CALIFORNIA, FLORIDA, TEXAS, INDIANA, KANSAS, NEW ENGLAND, NEW HAMPSHIRE, WISCONSIN, MISSOURI, & VIRGINIA