



Lift it.Store it.Repair it

CALL 866-799-LIFT

PEGASUS

YOUR REPAIR EQUIPMENT HEADQUARTERS.

AUTOMOTIVE AND LIGHT TRUCK GENERAL SERVICE

100% DESIGNED AND BUILT IN NORTH AMERICA

PEGASUS

4 POST LIGHT DUTY COMMERCIAL
LIFT FOR SERVICING SMALL CARS OR
LIGHT TRUCKS

19,000 LB. / 8.6T CAPACITY

DOUBLE WALL RUNWAYS WITH "Z" RAILS - 2 RUNWAYS LENGTHS
TO CHOOSE FROM



LSS4P19FD
LSS4P19FDXL

AVAILABLE IN GENERAL SERVICE OR FOR WHEEL ALIGNMENT

MAY 2020

The Liftsuperstore and all its registered trade marks are part of the TLS Lift Group. Please call us for product information on commercial and heavy duty lift products. www.tlslifts.com

OPTIONAL ACCESSORIES



Jacking beam 9,000 lb. 4.1T Capacity
5 yr warranty



Built in runway air inflation hoses &
Optional front radius plates/rear slip
plates



Removeable Runway Step Plat-
forms with non slip surface



Rolling waste oil drain

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT (5438)

4 POST SERVICE LIFT - "PEGASUS" 19,000 LB. / 8.6T CAPACITY



LSS4P19FD
LSS4P19FDXL

CATEGORY		CLOSED FRONT FOUR POST FLAT DECK SERVICE LIFT
	CAPACITY	19,000 lb. (8.6T)
A	RAISED HEIGHT	74" (1880mm)
B	LOWERED HEIGHT	10" (254mm)
C	OVERALL LENGTH EXTENDED	301 3/8" (7655mm)
C	OVERALL LENGTH STANDARD	274 3/8" (6969mm)
D	DECK LENGTH EXTENDED	238" (6045mm)
D	DECK LENGTH STANDARD	210 3/8" (5344mm)
E	WIDTH BETWEEN RUNWAYS	41" (1041mm)
F	RUNWAY DECK WIDTH	23" (584mm)
G	OVERALL WIDTH FRONT/REAR	150" (3810mm)
H	MAX COLUMN HEIGHT	86" (2184mm)
	MAXIMUM WHEEL BASE EXT.	209" / 5309mm
	MAXIMUM WHEEL BASE WB STD.	182" / 4623mm
	LIFT TIME	70 seconds
	ALI CERTIFIED WITH GOLD LABEL	YES
	POWER REQUIREMENTS	230V - 60Hz - 1Ph - 25 amp
	JACKING BEAM CAPACITY	9,000 LB. (4.1T)
	SHIPPING WEIGHT	5,000 lb. (2300 kg)

Disclaimer: TLS Inc. is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications included in this brochure are only accurate at the time of printing and are subject to change without notice.

FEATURES

- Built to higher quality standard; 100% North American made - premium US Bucher 2HP / 1.5kw power unit.
- Corrosion resistant protection - steel components are wheel-a-brator shot blasted and acid washed before a "double bake" powder coat finish is applied.
- Superior structural strength provides longer life and more precise alignments - Non flex double wall 23" / 584mm wide runways with built in "Z" rail. Heavy duty 10" x 8-3/8" x 1/4" wall / 254mm x 213mm x 6mm wall columns and 3" x 8-1/4" / 72mm x 210mm tube traverse beams.
- Greater flexibility with more models to chose from - Available in two runway lengths with built in wheel alignment or service deck. Lift can be ordered in red or blue.
- Premium options and accessories can expand the capabilities and service life - Stainless steel radius plates and rear steer plates, built in tire inflation hoses, removable work steps, LED runway lighting and premium long life 5 year warranty HD jacking beams
- Lower maintenance costs - Zirk style grease fittings at all 1-1/2" / 38mm plated hinge pins. Runway under rear slip plates is open to prevent water and dirt collecting. Forty (40) 7/8" / 22mm enclosed plated steel slip plate balls provide better support with minimal maintenance.
- Extended Life "Non Twist" Cable design - Machined steel nickel plated 9" / 229mm pulleys with bronze self lubricating bushings. Non spin fatigue resistant 9/16" / 14mm cables are routed on double stacked pulleys (versus four stacked) to reduce stress and wear.
- Low pressure hydraulics provides longer life - 4"ID x 65" / 102mm ID x 1651mm cylinder is mounted under the runway and use a premium "Parker" seal and wear ring with chrome plated plunger shaft.
- Designed for optimum productivity - Single point control with stainless steel cylinder air releases engage 12 locking positions. Adjustable locking ladders 81" x 2-3/4" x 3/8" / 2057mm x 70mm x 9.5mm thick allow for accurate levelling. There are

ADDITIONAL FEATURES

EQUIPMENT FOOTPRINT



Premium 9" (229mm) Pulley and Cables 9/16" (14mm) cables





North American "Bucher" 2 HP Power Unit



Double wall deck with Z rail



Includes air regulator water trap oiler

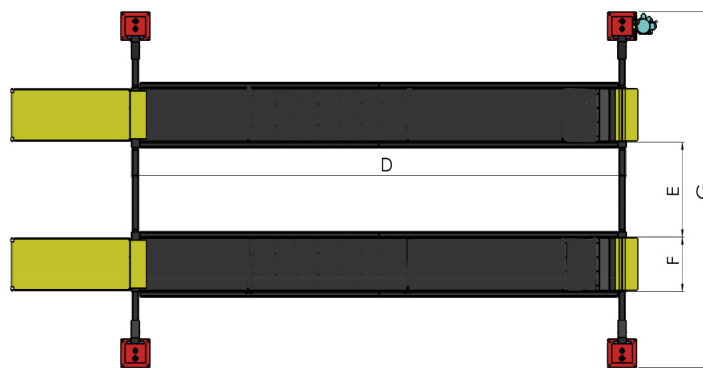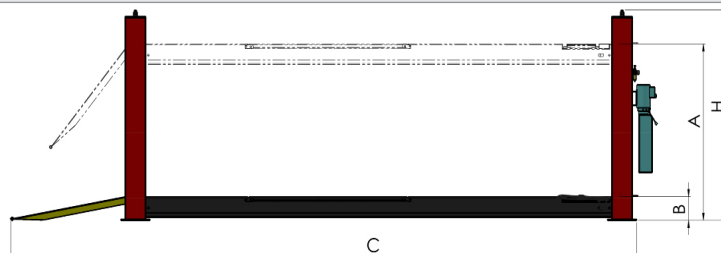

The Liftsuperstore

Retail locations throughout the USA & Canada

Head Office & Manufacturing Centre

2300 Speers Road, Oakville Ontario, L6L2X8

Call: 866-799-5438 Fax: 905-891-1214

May 2020

The Liftsuperstore and all it's registered trade marks are part of the TLS Lift Group. Please call us for product information on commercial and heavy duty lift products. www.tslifts.com