



RETAIL STORE LOCATIONS ACROSS THE USA & CANADA


CALL 866-799-LIFT

INTERLINK
LSS2P6PSR1



YOUR PARKING SOLUTION HEADQUARTERS. THE “INTERLINK” CAR STORAGE SOLUTION

WILL FIT IN MOST RESIDENTIAL GARAGES WITH A 10'/ 3040 MM CEILING
CAN BE USED AS A SINGLE OR MULTIPLES USING A “SHARED POST”
REQUIRES ONLY 170" X 98 1/2" (4310 X 2555MM) OF FLOOR SPACE
2 POST 6,000 LB. (2.7T) CAPACITY PARKING STORAGE LIFTING SYSTEM

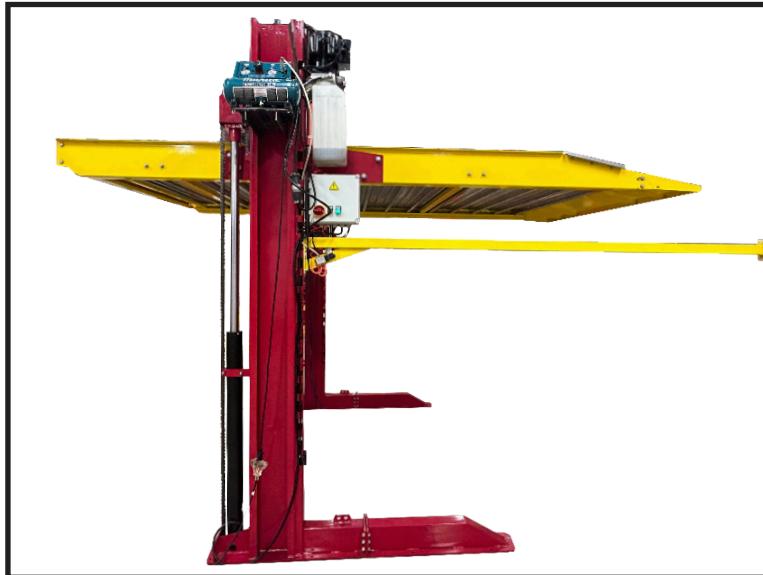

POWDER COATED WITH SAFETY YELLOW DECK & RUB RAILS




OPTIONAL 100% HOT DIPPED GALVANIZED AGAINST CORROSION

THE LIFTSUPERSTORE AND ALL IT'S REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP. PLEASE CALL US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS. WWW.TLSLIFTS.COM

October 2023

FEATURES

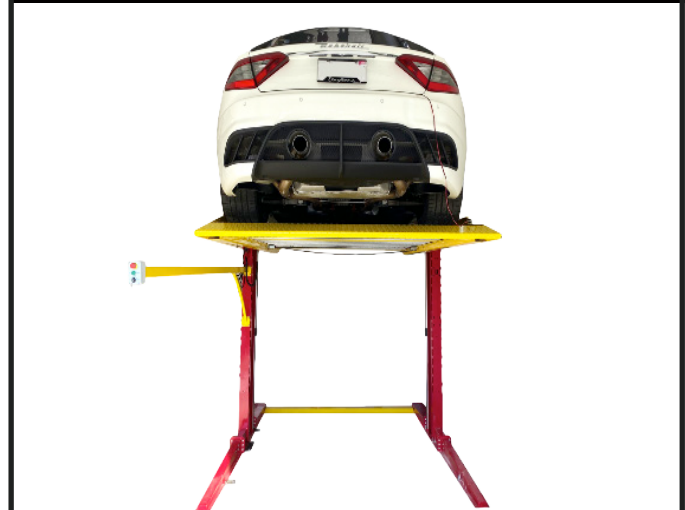

CLEARANCE BETWEEN COLUMNS 82 3/4" (2100MM)
RAISED HEIGHT 82 3/4" (2100MM) FOR CARS & SUV'S

- * HYDRAULIC CHAIN DRIVE LIFTING CYLINDERS
- * 100% LASER CUTTING FOR ALL PARTS & STRUCTURE
- * PROOF LOAD TESTED TO 12,000 LB.(5400 KG.)
- * EASY TO ASSEMBLE & DISSASSEMBLY FOR RELOCATION
- * INTEGRATED CONTROL OPERATES ON 24V
- * 17 PARKING HEIGHTS
- * SAFETY KEY SWITCH CONTROLLER
- * HYDRAULIC OVERLOAD PROTECTION & VELOCITY FUSES
- * ANTI SKID SMOOTH COAT RAMP AND PLATFORM
- * LIFT IS PROTECTED BY A POWDER COAT FINISH
- * CENTER DECK PLATES ARE GALVANIZED
- * OPTIONAL REMOTE CONTROL

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

2 POST PLATFORM
STORAGE LIFT
6,000 LB. (2.7T) CAPACITY



INTERLINK
LSS2P6PSR1

MULTIPLE CAR STORAGE

FEATURES



SPACE SAVING
DESIGN

“INTERLINK” - MAXIMIZE PARKING SPACE AVAILABLE


MULTIPLE LIFT INSTALLATIONS OF TWO
OR MORE USING A SHARED COLUMN




GALVANIZED SOLID
DECK

GALVANIZED RUNWAY WITH ELECTRICAL OR
OPTIONAL AIR LOCKING SYSTEM

ELECTRIC SAFETY LOCK

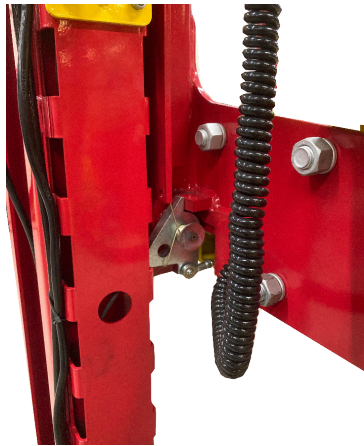

OPTIONAL AIR LOCKING

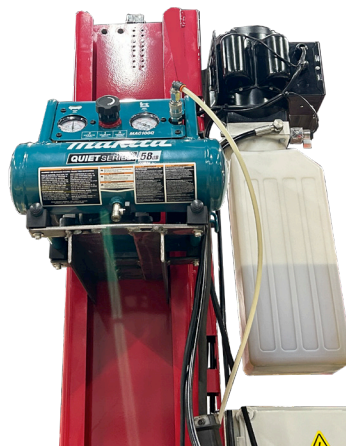

POWER UNIT & CONTROL



PHOTO ELECTRIC SAFETY



FLOOR OUTRIGGER LEGS



80.6" (2036MM) STRUCTURAL FLOOR
SIDE SUPPORT OUTRIGGERS

HYDRAULIC CHAIN DRIVE



ENGINEERED FOR SAFETY & DURABILITY **INTERLINK** IS
THE SOLUTION FOR ADDING MORE PARKING

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

2 POST PLATFORM STORAGE LIFT


6,000 LB. (2.7T) CAPACITY



INTERLINK LSS2P6PDS1

6,000 LB. / 2.7T RESIDENTIAL COMPACT DESIGN

IMPORTANT STRUCTURAL DIMENSIONS

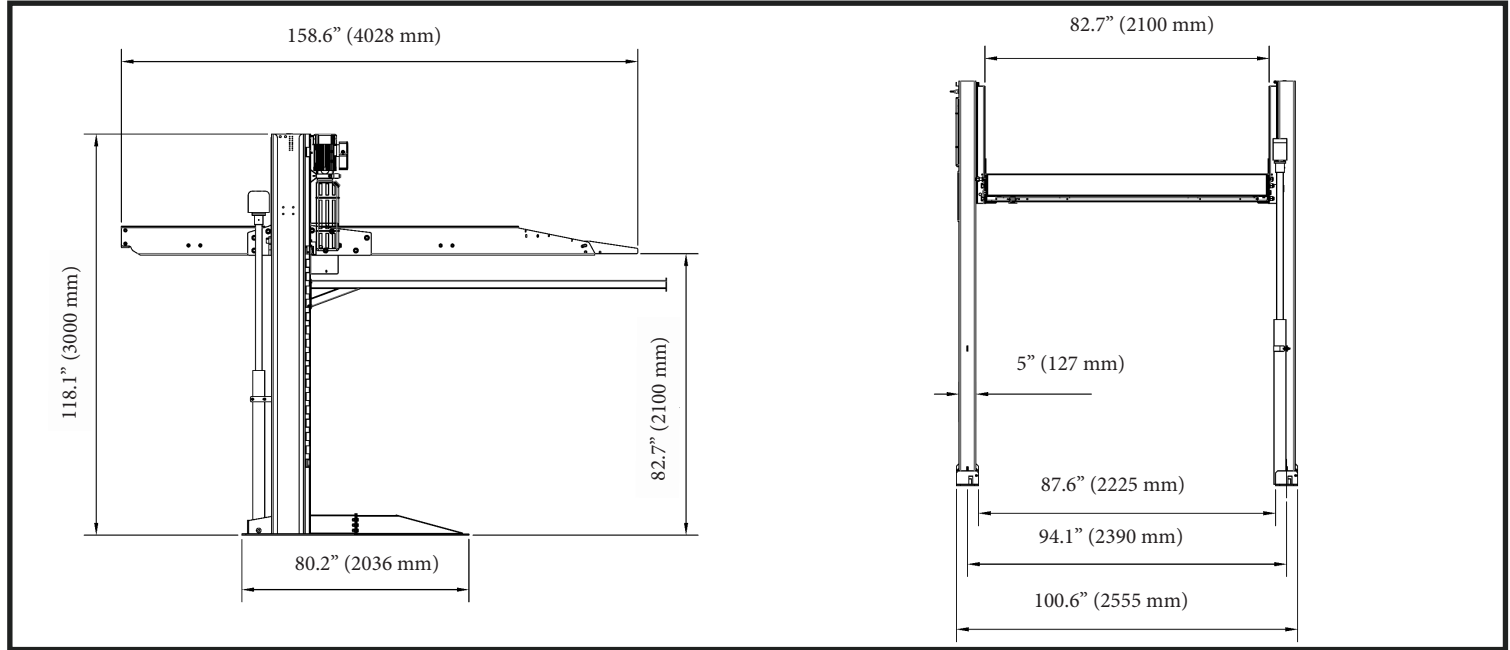

**USING LIFTS WITH SHARED COLUMN(S) SAVES SPACE -
5 LIFTS LINKED TOGETHER REQUIRE ONLY 39.8' / 12135MM**




Without shared post 5 units need 10 columns

With shared post 5 units only need 6 columns




100.6" / 2555mm

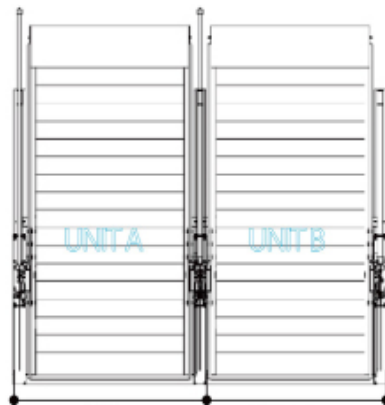

100.6" / 2555mm

94.3" / 2395mm

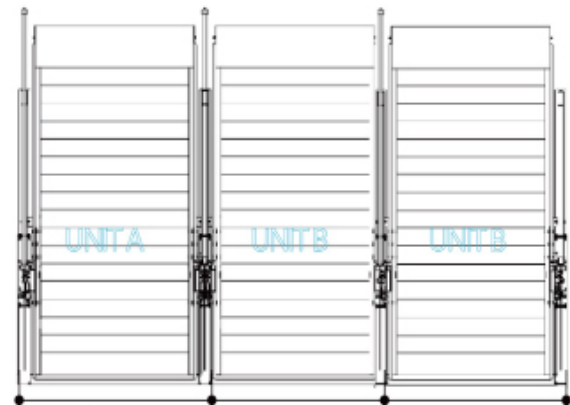

100.6" / 2555mm

94.3" / 2395mm

94.3" / 2395mm

100.7" / 2560mm wide

195" / 4955mm wide

289.2" / 7345mm wide

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

2 POST STORAGE LIFT

6,000 LB. (2.7T)

CAPACITY



INTERLINK

LSS2P6PDS1

TECHNICAL SPECIFICATIONS

SPECIFICATION	LSS2P6PDR1
Capacity	6,000 lb. / 2.7T
Number of lifting cylinders	1 cylinder / 2 cylinder
Runway Length with ramps	158 3/4" (4028 mm)
Overall width single lift	100 5/8" (2555mm)
Overall height of lift	118 1/4" (3000mm)
Column width when shared (center to center)	94" (2390mm)
Inside Columns	87 1/2" (2225mm)
Runway Width	82 1/2" (2097mm)
length of side outrigger bars	80 1/4" (2036mm)
Column Height	118 1/2" (3010 mm)
Runway Height	4 1/4" (108mm)
Lifting Height TO UNDER RUNWAY	83 1/4" (2112mm)
POWER TO LIFT CONTROLS	24V
LIFTING TIME	50 seconds
MOTOR	2 HP (1.5KW)
Mechanical Locking System	17 FULL RANGE ANTI FALL LOCKS
Power Requirement	220V / 60Hz / 1Ph - 15 amp
Shipping Weight	2210 lb. / 1004 kg.
SAFETY CONTROLS	PHOTOCELL SENSOR, EMERGENCY STOP BUT-TON & LIMIT SWITCH

INSTALL 5 LIFTS IN ONLY 40' / 12.2 M



USE OF A SHARED COLUMN

- * WITH TWO OR MORE LIFTS TOGETHER, ONE LIFT MUST BE THE STANDARD MODEL WITH ALL OTHER LIFTS HAVING ONE SHARED COLUMN
- * WITH EVERY LIFT USING A SHARED COLUMN THE WIDTH IS APPROXIMATELY 2.5" (65MM) NARROWER
- * USING LIFTS TOGETHER USING SHARED COLUMN(S) SAVES MONEY AND SPACE.

DISCLAIMER: TLS INC. IS CONSTANTLY UPDATING THEIR PRODUCTS TO MAINTAIN THE HIGHEST POSSIBLE STANDARDS OF PERFORMANCE AND SAFETY. THE SPECIFICATIONS INCLUDED IN THIS BROCHURE ARE ONLY ACCURATE AT THE TIME OF PRINTING AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.

CONTACT US NOW

866-799-LIFT



THE LIFTSUPERSTORE
HEADOFFICE & MANUFACTURING
2300 SPEERS RD OAKVILLE ONTARIO



AUTHORIZED TLS DISTRIBUTORS LOCATED: ALABAMA, ARIZONA, CALIFORNIA, FLORIDA, TEXAS, INDIANA, KANSAS, NEW ENGLAND, NEW HAMPSHIRE, WISCONSIN, MISSOURI, & VIRGINIA