



CALL 866-799-LIFT

WWW.LIFTSUPERSTORE.COM

INTERLINK

LSS2P5PDS1

LSS2P6PDS1

YOUR PARKING SOLUTION HEADQUARTERS.



THE "INTERLINK" CAR STORAGE SOLUTION

INTERLINK

2 POST PARKING LIFTS THAT CAN BE USED AS A SINGLE OR MULTIPLES USING A "SHARED POST"

5,000 OR 6,000 LB. (2.3T OR 2.7T) CAPACITY WITH A FOOT PRINT OF ONLY 170" X 100 3/4" (4310 X 2560MM)

FEATURES



- * DOUBLE HYDRAULIC DIRECT DRIVE LIFTING CYLINDERS
- * 100% LASER CUTTING FOR ALL PARTS & STRUCTURE
- * PROOF LOAD TESTED TO 12,000 LB.(5400 KG.)
- * EASY TO ASSEMBLE & DISSASSEMBLY FOR RELOCATION
- * INTEGRATED CONTROL OPERATES ON 24V
- * 17 PARKING HEIGHTS
- * SAFETY KEY SWITCH CONTROLLER
- * HYDRAULIC OVERLOAD PROTECTION & VELOCITY FUSES
- * ANTI SKID SMOOTH COAT RAMP AND PLATFORM
- * LIFT IS PROTECTED BY A POWDER COAT FINISH
- * CENTER DECK PLATES ARE GALVANIZED
- * OPTIONAL REMOTE CONTROL



CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT

2 POST PLATFORM
STORAGE LIFT

5,000 LB. (2.3T) OR 6,000 LB.
(2.7T) CAPACITY



INTERLINK
LSS2P5PDS1
LSS2P6PDS1

MULTIPLE CAR STORAGE


FEATURES

“INTERLINK” - MAXIMIZE PARKING SPACE AVAILABLE

INTERLINK

MULTIPLE LIFT INSTALLATIONS OF TWO OR
MORE USING A SHARED COLUMN

ENGINEERED FOR SAFETY & DURABILITY INTERLINK IS
THE SOLUTION FOR ADDING MORE PARKING

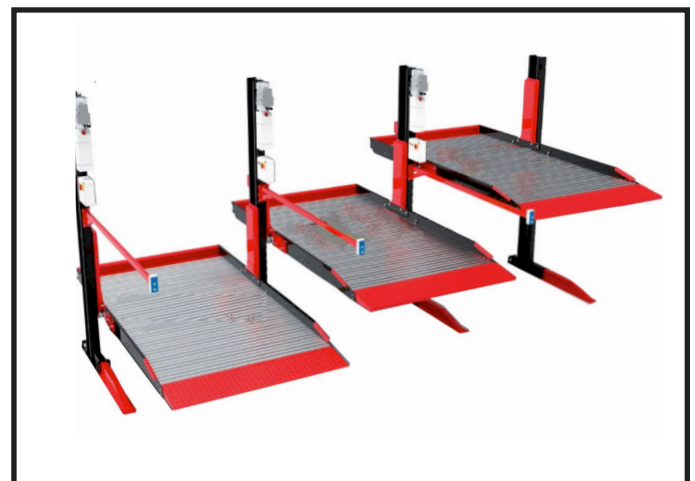

THE LIFTSUPERSTORE
RETAIL LOCATIONS THROUGHOUT THE USA &
CANADA

HEAD OFFICE & MANUFACTURING CENTRE
2300 SPEERS ROAD, OAKVILLE ONTARIO,

THE LIFTSUPERSTORE AND ALL ITS REGISTERED
TRADE MARKS ARE PART OF THE TLS LIFT GROUP.
PLEASE CALL US FOR PRODUCT INFORMATION ON
COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS.

2 POST PLATFORM

STORAGE LIFT

5,000 LB. (2.3T) OR 6,000 LB. (2.7T) CAPACITY





The Lift Super Store
We make buying lifts easy!

LSS2P6PDS1

6,000 LB. / 2.7T TWIN CYLINDER

5,000 LB. / 2.3T SINGLE CYLINDER

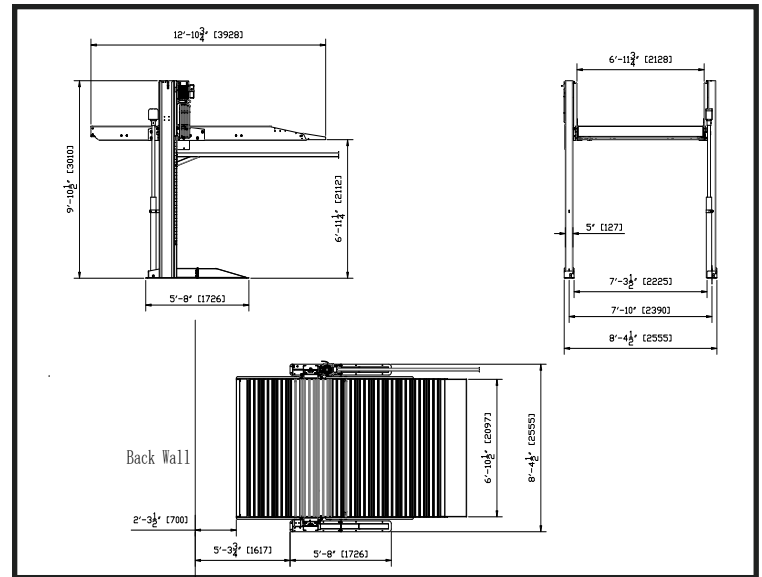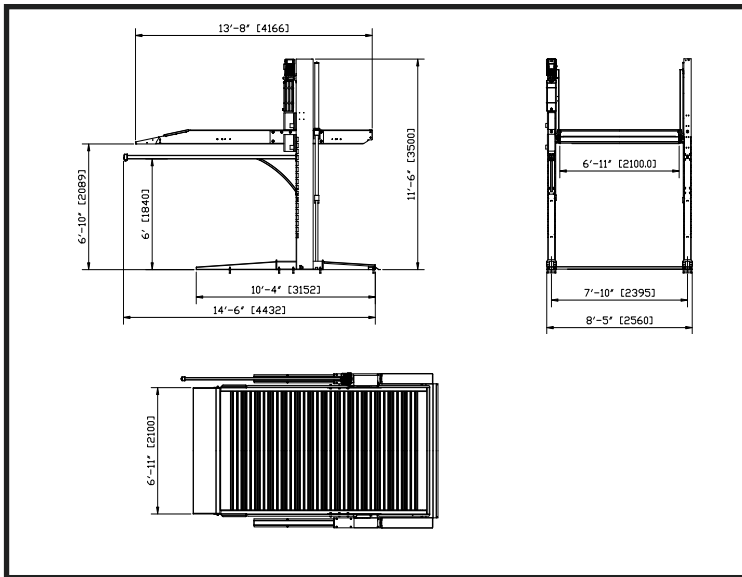

USING LIFTS TOGETHER WITH SHARED COLUMN(S) SAVES MONEY AND SPACE



Without post sharing, 5 units need 10 posts



With post sharing, 5 units need 6 posts

TP-270 Width Calculation

(Unit A = Independent Type Unit B = Dependent Type)


INTERLINK



2,560mm



4,955mm

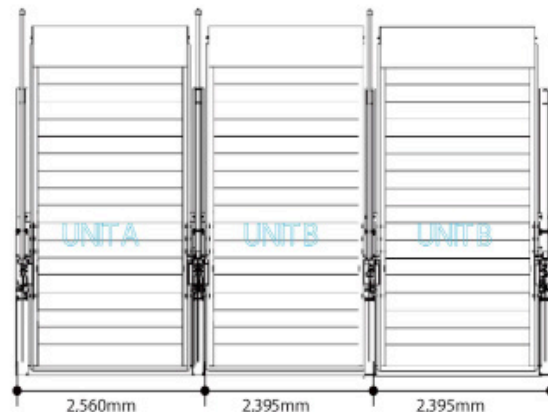

7,350mm



THE LIFTSUPERSTORE
RETAIL LOCATIONS THROUGHOUT THE USA & CANADA

HEAD OFFICE & MANUFACTURING CENTRE
2300 SPEERS ROAD, OAKVILLE ONTARIO,

THE LIFTSUPERSTORE AND ALL IT'S REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP. PLEASE CALL US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS.

2 POST STORAGE LIFT

5,000 LB. (2.3T) OR 6,000 LB. (2.7T)
CAPACITY



INTERLINK

LSS2P5PDS1
LSS2P6PDS1

TECHNICAL SPECIFICATIONS

SPECIFICATION	LSS2P5PDR1	LSS2P6PDR1
CAPACITY	5,000 LB. /2.3T	6,000 LB. / 2.7T
NUMBER OF LIFTING CYLINDERS	1 CYLINDER	2 CYLINDERS
RUNWAY LENGTH WITH RAMPS	154 3/4" (3928 MM)	164" (4166MM)
OVERALL WIDTH SINGLE LIFT	100 5/8" (2555MM)	100 7/8" (2560MM)
OVER HEIGHT	118 1/2" (3010MM)	137 7/8" (3500MM)
INSIDE COLUMNS	82 3/4" (2100MM)	83 3/4" (2126MM)
RUNWAY WIDTH	82 1/2" (2097MM)	82 3/4" (2100MM)
LENGTH OF SIDE OUTRIGGER BARS	68" (1726MM)	124 1/8" (3151MM)
COLUMN HEIGHT	128 1/2" (3010MM)	137 7/8" (3500MM)
RUNWAY HEIGHT	4 1/4" (108MM)	4 1/4" (108MM)
LIFTING HEIGHT TO UNDER RUNWAY	83 1/4" (2112MM)	82" (2089MM)
POWER TO LIFT CONTROLS	24V	24V
LIFTING TIME	50 SECONDS	45 SECONDS
MOTOR	3 HP (2.2KW)	3 HP (2.2KW)
MECHANICAL LOCKING SYSTEM	17 FULL RANGE ANTI FALL LOCKS	17 FULL RANGE ANTI FALL LOCKS
POWER REQUIREMENT	230V / 60HZ / 1PH - 11 AMP	230V / 60HZ / 1PH - 11 AMP
SHIPPING WEIGHT	2210 LB. / 1004 KG.	2420 LB. / 1100 KG
SAFETY CONTROLS	PHOTOCELL SENSOR, EMERGENCY STOP BUTTON & LIMIT SWITCH	PHOTOCELL SENSOR, EMERGENCY STOP BUTTON & LIMIT SWITCH

S



USE OF A SHARED COLUMN

- * WITH TWO OR MORE LIFTS TOGETHER, ONE LIFT MUST BE THE STANDARD MODEL WITH ALL OTHER LIFTS HAVING ONE SHARED COLUMN
- * WITH EVERY LIFT USING A SHARED COLUMN THE WIDTH IS APPROXIMATELY 2.5" (65MM) NARROWER
- * USING LIFTS TOGETHER USING SHARED COLUMN(S) SAVES MONEY AND SPACE.

DISCLAIMER: TLS INC. IS CONSTANTLY UPDATING THEIR PRODUCTS TO MAINTAIN THE HIGHEST POSSIBLE STANDARDS OF PERFORMANCE AND SAFETY. THE SPECIFICATIONS INCLUDED IN THIS BROCHURE ARE ONLY ACCURATE AT THE TIME OF PRINTING AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.



THE LIFTSUPERSTORE
RETAIL LOCATIONS THROUGHOUT THE USA & CANADA

HEAD OFFICE & MANUFACTURING CENTRE
2300 SPEERS ROAD, OAKVILLE ONTARIO,

THE LIFTSUPERSTORE AND ALL IT'S REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP. PLEASE CALL US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS.