

۲


LOW-RISE RISE CANTILEVER PAD LIFT 10,000 LB. / 4.5T CAPACITY



LSSL10R1 LSSL10R1FM

OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER AND COST LESS TO OPERATE

۲

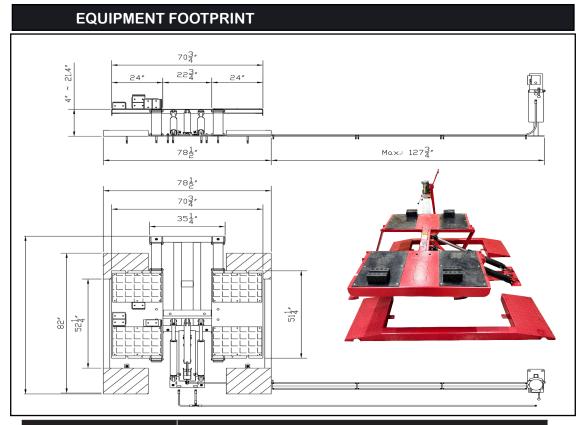

CAPACITY		
	10,000 LBS. / 24.5T	
POWER SUPPLY	220V 20AMP 2HP (1.5KW)	110V 15AMP 1HP (.75KW)
HYDRAULIC CYLINDERS	2 @ 4" OD X 22" LONG / 102MM OD X 559MM LONG	
MECHANICAL LOCK POSI- TIONS	3	
LIFTING TIME	30 SECONDS (220V)	50 SECONDS 110V)
OVERALL WIDTH	78 1/2" / 1994MM	
OVERALL LENGTH	92 1/2" / 2350MM	
DRIVE OVER HEIGHT	4" / 102MM	
OVERALL LIFTING HEIGHT	21.4" / 544MM (30"ADAPTERS)	
DISTANCE BETWEEN LIFTING PADS	22 3/4" / 578мм	
DISTANCE FROM LIFT TO POWER UNIT	127 3/4" / 3245мм	
FINISH	DOUBLE BAKE POWDER COAT	
HEIGHT ADAPTERS	MOVEABLE RUBBER BLOCKS	
FRAME DIMENSIONS	52 1/2" X 78-1/2" / 1016MM X 1816MM	
DECK WIDTH	24" / 610MM	
DECK LENGTH	51 1/4" / 1302	
SHIPPING WEIGHT	866 LB. / 393KG	
LOW RISE PART #	LSSL10R1	LSSL10R4

CONTACT US NOW

866-799-LIFT

THE LIFTSUPER STORE HEADOFFICE & MANUFACTURING 2300 SPEERS RD OAKVILLE ONTARIO

AUTHORIZED DISTRIBUTORS - ALABAMA, ARIZONA, CALIFORNIA, FLORIDA, TEXAS, INDIANA, KANSAS, NEW ENGLAND, NEW HAMP-SHIRE, WISCONSIN , MISSOURI & VIRGINIA

۲

 (\bullet)